

TV Series

TV Evaporator

Hot Gas Defrost

TV model unit coolers are specifically designed for commercial freezer applications. Time tested for many years, these virtually maintenance-free unit coolers are built with Kramer reliability.

These units are suitable for low and medium temperatures in the range of -40°F to +35°F.

Features:

- Corrosion resistant unit of sturdy construction.
- Coils constructed of Copper tubes and Aluminum fins.
- Industrial evaporators with 4 FPI.
- Dependable rating based on laboratory tests.
- Fan motors have built-in O/L protection.
- Hot gas heated drain pan for positive condensate drainage.
- Factory wired for quick field installation.
- Optional high pressure propeller fans.



Capacity Data • BTU/HR @ 10° TD

	MODEL	Evaporator Temperature - °F							
		+25°	+20°	+10°	0°	-10°	-20°	-30°	-40°
4 FPI	TV-400	45700	45000	44000	43000	41500	40000	38000	35600
	TV-550	62900	62000	60500	58900	57200	55000	52300	49000
	TV-750	86300	85000	83000	80000	78000	75000	71500	67000
	TV-950	108600	107000	104500	101500	99000	95000	90000	85000
	TV-1100	123900	122000	119000	115000	112000	108000	102500	96000
	TV-1200	137100	135000	132000	128500	125000	120000	114000	107000
	TV-1400	160400	158000	154000	150000	145500	140000	133000	124500
	TV-1600	182700	180000	176000	171000	166500	160000	152000	142500
	TV-1900	213200	210000	205000	199000	193500	186000	176500	165500

Performance Data

4 FPI	MODEL	CFM (2)	Air Throw (FT) (3)	Motors (4)		Total Fan Motor Amps (4)	
				QTY.	H.P.	230-3-60	460-3-60
4 FPI	TV-400D	8600	50	2	1/2	3.6	1.8
	TV-400PP	11700	75	2	1/2	9.6	4.8
	TV-550D	8400	50	2	1/2	3.6	1.8
	TV-550PP	11200	75	2	1/2	9.6	4.8
	TV-750D	13100	100	2	3/4	7.0	3.5
	TV-750PP	17600	125	2	3	17.2	8.6
	TV-950D	15000	100	2	3/4	7.0	3.5
	TV-950PP	16800	125	2	3	17.2	8.6
	TV-1100D	14500	100	2	3/4	7.0	3.5
	TV-1100PP	16500	125	2	3	17.2	8.6
	TV-1200D	20200	100	3	3/4	10.5	5.3
	TV-1200PP	22600	125	3	3	25.8	12.9
	TV-1400D	19500	100	3	3/4	10.5	5.3
	TV-1400PP	22000	125	3	3	25.8	12.9
	TV-1600D	26900	100	4	3/4	14.0	7.0
	TV-1600PP	32000	125	4	3	34.4	17.2
	TV-1900D	26000	100	4	3/4	14.0	7.0
	TV-1900PP	31500	125	4	3	34.4	17.2

Connections Data

4 FPI	MODEL	Connections (in) (5)				
		Suction O.D.	Liquid O.D.	Hot GAS O.D.	Ext. Equal O.D.	Drain MPT
4 FPI	TV-400D	1-3/8	1-3/8	1-1/8	1/4	1
	TV-400PP	1-3/8	1-3/8	1-1/8	1/4	1
	TV-550D	1-5/8	1-5/8	1-1/8	1/4	1
	TV-550PP	1-5/8	1-5/8	1-1/8	1/4	1
	TV-750D	1-5/8	1-5/8	1-1/8	1/4	1
	TV-750PP	1-5/8	1-5/8	1-1/8	1/4	1
	TV-950D	2-1/8	1-5/8	1-1/8	1/4	1
	TV-950PP	2-1/8	1-5/8	1-1/8	1/4	1
	TV-1100D	2-1/8	1-5/8	1-3/8	1/4	1-1/2
	TV-1100PP	2-1/8	1-5/8	1-3/8	1/4	1-1/2
	TV-1200D	2-1/8	1-5/8	1-3/8	1/4	1-1/2
	TV-1200PP	2-1/8	1-5/8	1-3/8	1/4	1-1/2
	TV-1400D	2-1/8	1-5/8	1-3/8	1/4	1-1/2
	TV-1400PP	2-1/8	1-5/8	1-3/8	1/4	1-1/2
	TV-1600D	2-1/8	1-5/8	1-5/8	1/4	1-1/2
	TV-1600PP	2-1/8	1-5/8	1-5/8	1/4	1-1/2
	TV-1900D	(2) 2-1/8	(2) 1-1/8	1-5/8	(2) 1/4	1-1/2
	TV-1900PP	(2) 2-1/8	(2) 1-1/8	1-5/8	(2) 1/4	1-1/2


2. "D" - Direct Drive High efficiency propeller fans.
 "PP" - Direct Drive with high pressure axial propeller fans.
 Do NOT use "PP" models above +25° box temperature.
 "PP" models can operate with ESP up to 0.5".
 At this condition CFM will drop to "D" model CFM.

3. Unrestricted air flow.
 4. Single phase motors available on "D" models only, contact factory.
 5. Connection sizes are based on R-22, and may vary from catalog
 when actual site operating conditions are provided at time of order

Dimensional Data



4 FPI	MODEL	Dimensions (in)							Ret. Chrg. (lbs.) (6)	Approx. Ship Weight (lbs.)	
		A	B	C	D	E	F	G			H
	TV-400D	3-1/4	26	31-3/4	42-7/8	58	75	2-1/2	7-1/2	8	760
	TV-400PP	3-1/4	26	31-3/4	42-7/8	58	75	2-1/2	7-1/2	8	850
	TV-550D	3-1/4	26	31-3/4	42-7/8	58	75	2-1/2	7-1/2	13	860
	TV-550PP	3-1/4	26	31-3/4	42-7/8	58	75	2-1/2	7-1/2	13	950
	TV-750D	3-7/8	26	32-3/8	42-7/8	94	111	2-1/2	7-1/2	17	1150
	TV-750PP	3-7/8	26	32-3/8	42-7/8	94	111	2-1/2	7-1/2	17	1360
	TV-950D	3-7/8	26	32-3/8	42-7/8	94	111	2-1/2	7-1/2	19	1260
	TV-950PP	3-7/8	26	32-3/8	42-7/8	94	111	2-1/2	7-1/2	19	1440
	TV-1100D	5-3/4	28	36-1/8	43-3/4	94	111	2-1/2	7-1/2	25	1350
	TV-1100PP	5-3/4	28	36-1/8	43-3/4	94	111	2-1/2	7-1/2	25	1580
	TV-1200D	7-1/2	28-1/4	41-3/4	47-1/4	113-1/4	136	2-3/8	11-3/8	25	2130
	TV-1200PP	7-1/2	28-1/4	41-3/4	47-1/4	113-1/4	136	2-3/8	11-3/8	25	2430
	TV-1400D	7-1/2	28-1/4	41-3/4	47-1/4	113-1/4	136	6	11-3/8	33	2280
	TV-1400PP	7-1/2	28-1/4	41-3/4	47-1/4	113-1/4	136	6	11-3/8	33	2530
	TV-1600D	7-1/2	28-1/4	41-3/4	47-1/4	151-1/4	174	6	11-3/8	33	2370
	TV-1600PP	7-1/2	28-1/4	41-3/4	47-1/4	151-1/4	174	6	11-3/8	33	2670
TV-1900D	7-1/2	28-1/4	41-3/4	47-1/4	151-1/4	174	6	14-7/16	43	2580	
TV-1900PP	7-1/2	28-1/4	41-3/4	47-1/4	151-1/4	174	6	14-7/16	43	2780	

MODELS: TV-400, 550, 750, 950 & 1100

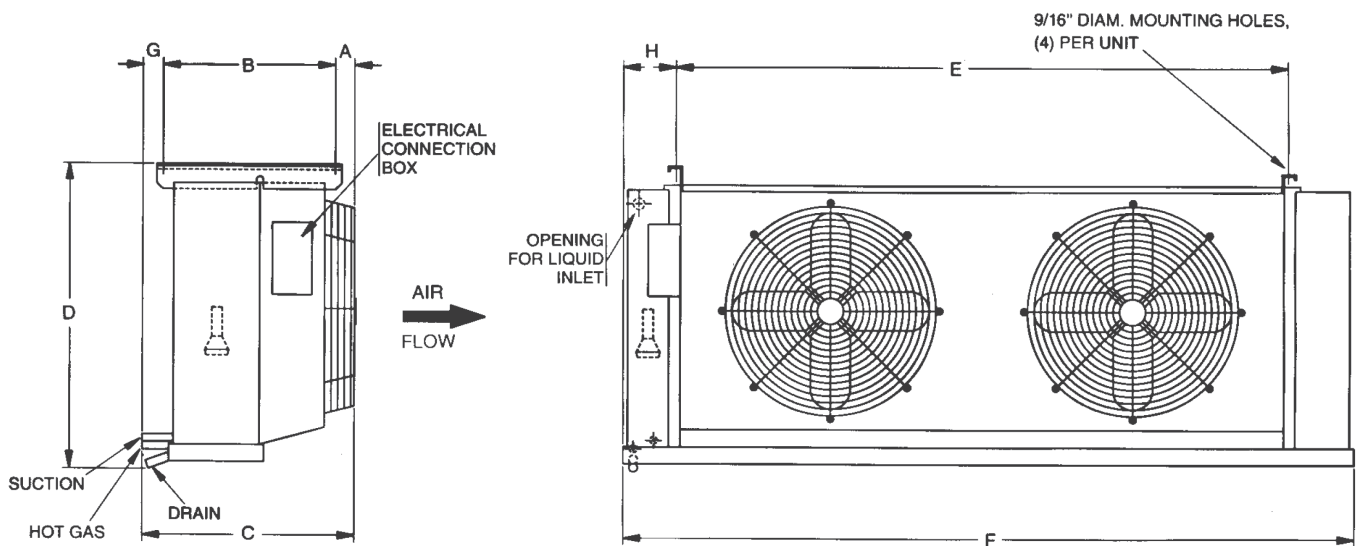



NOTES: LEFT HAND COIL IS SHOWN, AND IS STANDARD. RIGHT HAND COIL MUST BE SPECIFIED WHEN ORDERING.
ALL DIMENSIONS ARE IN INCHES.

MODELS: TV-1200 & 1400

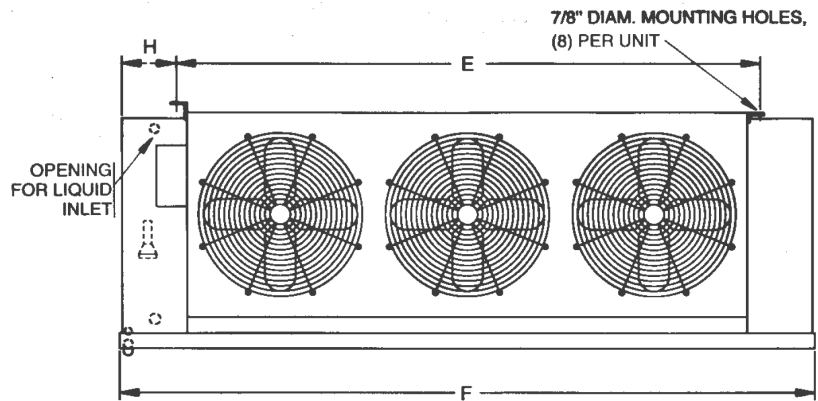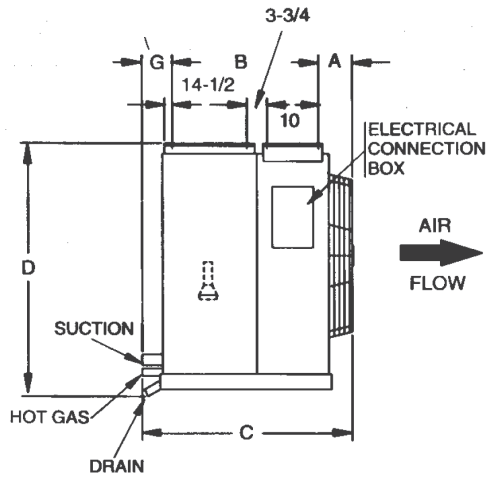

NOTES: LEFT HAND COIL IS SHOWN, AND IS STANDARD. RIGHT HAND COIL IS AVAILABLE AND MUST BE SPECIFIED WHEN ORDERING.
ALL DIMENSIONS ARE IN INCHES.

MODELS: TV-1600 & 1900

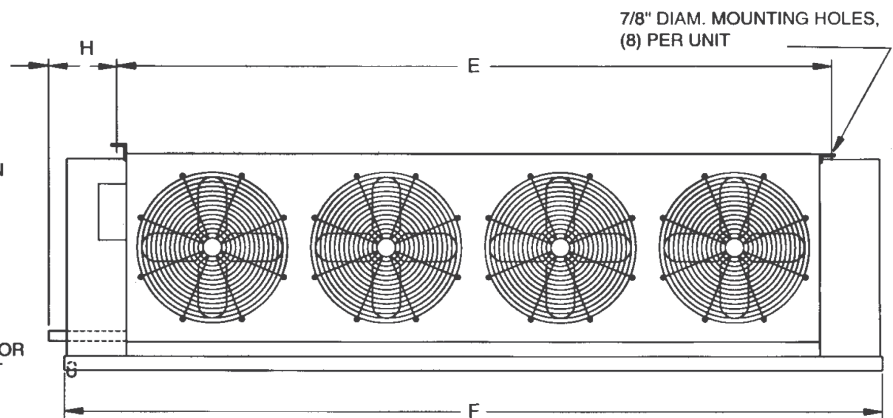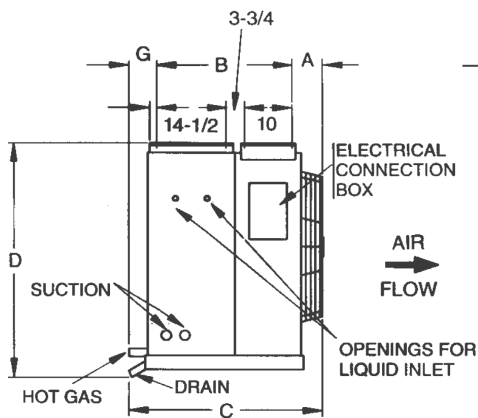

NOTES: LEFT HAND COIL IS SHOWN, AND IS STANDARD. RIGHT HAND COIL MUST BE SPECIFIED WHEN ORDERING.
ALL DIMENSIONS ARE IN INCHES.

Specifications and Dimensions are subject to change without notice.