




WAREHOUSE UNIT COOLER

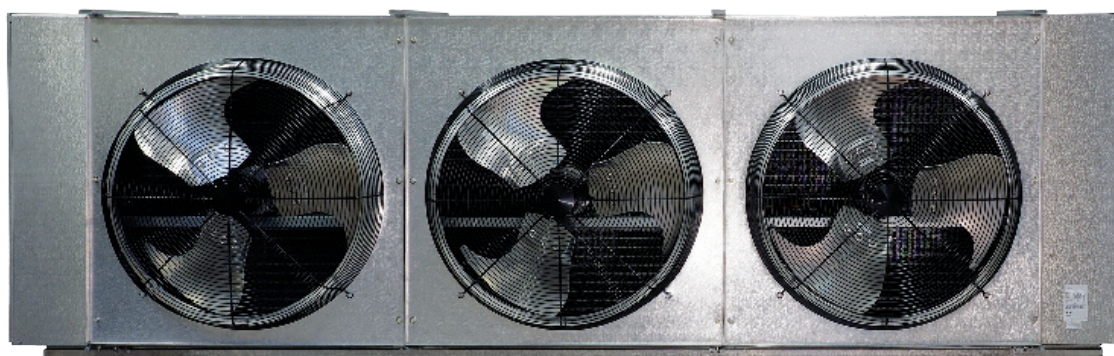

Walk-Ins: Medium to Large Cooler and Freezer Applications

Warehouse Unit Coolers are designed exclusively for applications 3,000 sq. ft. and larger.

Air Defrost

34,500 to 282,500 BTUH

Electric Defrost

36,400 to 246,100 BTUH

Hot Gas Defrost

36,400 to 246,100 BTUH



FEATURES

Our Warehouse Unit Coolers are the ideal evaporator solution for large walk-in coolers and freezers. Designed with efficiency, performance and service in mind, it's optimized to cover Cold Storage applications in the most effective way. They feature rail-mount three-phase motors with standard or high static pressure prop fan blades. All units are circuited for multiple refrigerants and feature optimized circuit patterns to maximize performance.

Warehouse Unit Coolers have several enhanced service features including new high efficiency fan and venturi designs, enhanced surface coil tubing, easily removable fan guards and modular fan panels, face mount defrost heaters, hinged drain pans and shipping pallets designed to facilitate easy installation.

Warehouse models are designed exclusively for use in walk-in coolers and freezers 3,000 sq. feet and larger and fall outside of the July 2020 Department of Energy Factor (AEF) regulations.

SIZES

There are a wide array of sizes to match your specific application requirements ranging from 34,500 to 282,500 BTUH at a 10°TD. Models are available with air flow spanning a range of 6,875 to 27,500 CFM.

HOUSING

Each unit is constructed with a rust-free, textured, aluminum housing which is light weight yet extremely durable. Models feature hinged drain pans to allow for convenient servicing and maintenance. Hanger holes are provided on all units for fast installation.

COIL

Seamless copper tubes are staggered and mechanically expanded into corrugated aluminum fins to assure maximum heat transfer. Die formed fin collars are provided for accurate fin spacing. Heavy gauge hangers are fastened directly to the tube sheet of the coil to provide high structural strength. Low Temp Electric Defrost and Hot Gas Defrost Models are available in both 6 FPI and 4 FPI. Medium Temp Electric Defrost and Air Defrost models are available in 6 FPI.

MOTORS

Models are offered with three-phase motors with standard or high static pressure prop fan blades.

FANS & FAN GUARDS

Powerful heavy-duty aluminum fans are individually balanced to provide vibration free operation. Standard heavy gauge wire fan guards are UL/cUL-approved epoxy coated for corrosion resistance. High-static pressure prop fan blades are also available. Air throw for Warehouse Unit Coolers is 120 ft. with standard fan. If you require a high-static fan prop in an application above freezing, please contact factory.

REFRIGERANTS

Warehouse Unit Coolers are optimized for multiple refrigerants including R404A, R407A, R448A, R449A and R744 DX (CO₂). Please specify system refrigerant requirements when ordering. A separate compartment is provided for all refrigerant connections which allows ample room for internal mounting of expansion valves.

AIR DEFROST

Air Defrost models are designed for use in coolers at +35°F and warmer.

ELECTRIC DEFROST - MEDIUM TEMP

Medium Temperature Electric Defrost Models are designed for use in coolers between +10°F and +35°F. Defrost heaters are mounted on the air intake side of the unit for optimal performance and easy maintenance. An additional heater is installed inside the drain pan for fast, reliable drainage. Adjustable defrost termination, fan delay and heater safety controls are factory mounted for optimum performance of each control function.

ELECTRIC DEFROST - LOW TEMP

Low Temperature Electric Defrost Models are designed for use in freezers between +9°F and -30°F. Defrost heaters are mounted on the air intake side of the unit for optimal performance and easy maintenance. An additional heater is installed inside the drain pan for fast, reliable drainage. Adjustable defrost termination, fan delay and heater safety controls are factory mounted for optimum performance of each control function.

HOT GAS DEFROST

There are two types of Hot Gas Defrost models available: a 3-pipe Hot Gas models or a 2-Pipe Hot Gas Reverse Cycle units. Additionally, each type of hot gas defrost model is also available with either a hot gas loop in the drain pan or an electric heater in the drain pan. Hot Gas Defrost 6 FPI models are designed for use in coolers and freezers between 35°F and -30°F, and Hot Gas Defrost 4 FPI models are designed for use in freezers between 32°F and -30°F. All Hot gas models include adjustable defrost termination and fan delay controls, which are factory mounted for optimum performance of each control function. Refer to the current Russell Technical Bulletin for piping. Reverse Cycle units can also be used for Alternating Evaporator Systems.

ELECTRICAL

Available in 208-230V/3 or 460/3. A large compartment is supplied for all electrical components and is easily accessible by removing the end panel. All models are UL and cUL listed.


OPTIONAL FEATURES

- EcoNet® Enabled Controller¹ (factory-installed) (EcoNet® not available on Hot Gas Evaporators)
- EcoNet® Command Center (loose)
- Reverse Connections
- Thermostat - Mechanical or Electric (mounted or loose)
- Thermostatic Expansion Valve (mounted or loose)
- Electronic Expansion Valve (mounted or loose)
- Liquid Line Solenoid Valve (mounted or loose)
- Insulated Drain Pan
- Painted Cabinet (White or Black)
- Stainless Steel Cabinet
- Coated Coil (Bronz-Glow, or Electrofin®)
- Heat Exchanger (loose)

¹ EcoNet® Control Package includes: EEV, suction pressure transducer, suction entering air coil temp. thermistors, thru-the-door disconnect switch, local on-board two-row backlit LCD display and push-button adjustments. (Controller replaces TXV, liquid line solenoid valve, room thermostat, defrost termination, fan delay, and time clock.)

ECONET® ENABLED UNIT COOLERS (OPTIONAL)

- Developed in conjunction with Rheem Manufacturing specifically for walk-in coolers and freezers — it builds on the reliability and efficiency of Rheem's EcoNet® technology
- Saves energy in refrigeration systems through precise superheat and space temperature control, fan cycling, and controlling how often the system goes into defrost based on compressor runtime
- Eliminates unnecessary defrosts
- Maximizes energy efficiency with less compressor runtime
- Reduces fan speed to 50% during off cycle for energy savings
- Can be used with a condensing unit in single and multiple evaporator installations as a group
- Optional EcoNet® Command Center with intuitive graphical interface controls up to 32 devices (including the Command Center) through one display, continuous communication between system components, and remote mount display allows for EcoNet® Enabled Unit Coolers to be programmed, monitored and troubleshot outside of space being cooled.

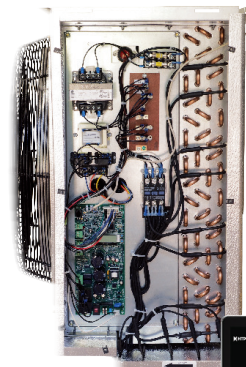

MODEL NOMENCLATURE

R	W	6	E	143	E	T	A
Brand	Style	Fins per Inch (FPI)	Defrost Type	BTUH in Thousands	Unit Voltage ¹	Motor Type	Vintage
R = Russell	W = Warehouse Z = Opposite Hand W (LEFT)	4 FPI 6 FPI	A = Air D = Medium Temp Electric Defrost E = Low Temp Electric Defrost H = Hot Gas 3-Pipe with Electric Drain Pan G = Hot Gas Reverse with Electric Drain Pan K = Hot Gas 3-Pipe with Hot Gas Drain Pan L = Hot Gas Reverse with Hot Gas Drain Pan	XXX	E = 208-230/3/60 G = 460/3/60	T = Three Phase H = Three Phase with High-Static	A

APPLICATION RATING & ELECTRICAL DATA

AIR DEFROST // 3-PHASE MOTOR

Model No.	BTUH Capacity @ 25°F SST & 10°F TD		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/R449A [^]			Total Fan Motor Amps	
RW6A034*TA	34,500	40,400	7,080	1	4.1	2.0
RW6A047*TA	47,000	55,000	7,010	1	4.1	2.0
RW6A058*TA	58,200	68,900	6,875	1	4.1	2.0
RW6A069*TA	69,600	80,900	14,160	2	8.2	4.0
RW6A094*TA	94,500	111,500	14,030	2	8.2	4.0
RW6A117*TA	117,200	138,800	13,750	2	8.2	4.0
RW6A143*TA	143,100	167,000	21,040	3	12.3	6.0
RW6A176*TA	176,000	207,500	20,625	3	12.3	6.0
RW6A190*TA	190,100	226,100	28,050	4	16.4	8.0
RW6A234*TA	234,900	282,500	27,500	4	16.4	8.0

Model No.	208-230V/3				460V/3			
	Base Model		EcoNet® Enabled ¹		Base Model		EcoNet® Enabled ¹	
	MCA	MOPD	MCA	MOPD	MCA	MOPD	MCA	MOPD
RW6A034*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A047*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A058*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A069*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A094*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A117*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A143*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A176*TA	15.0	20	15.0	20	15.0	20	15.0	20
RW6A190*TA	17.4	20	19.4	20	15.0	20	15.0	20
RW6A234*TA	17.4	20	19.4	20	15.0	20	15.0	20

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

¹ EcoNet® Enabled Units are not powered by Condensing Unit so Defrost Heaters are incorporated into shown MCA/MOPD.

EcoNet® Enabled Calculation includes a minimum 1 Amp for control voltages.

APPLICATION RATING & ELECTRICAL DATA

MEDIUM TEMPERATURE ELECTRIC DEFROST // 3-PHASE MOTOR // 6 FPI

Model No.	BTUH Capacity @ +25F SST & +10F TD ¹		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/R449A [^]			Total Fan Motor Amps	
RW6D033*TA	34,500	40,400	7080	1	4.1	2.0
RW6D046*TA	47,000	55,000	7010	1	4.1	2.0
RW6D057*TA	58,200	68,900	6875	1	4.1	2.0
RW6D068*TA	69,600	80,900	14160	2	8.2	4.0
RW6D093*TA	94,500	111,500	14030	2	8.2	4.0
RW6D116*TA	117,200	138,800	13750	2	8.2	4.0
RW6D142*TA	143,100	167,000	21040	3	12.3	6.0
RW6D175*TA	176,000	207,500	20625	3	12.3	6.0
RW6D189*TA	190,100	226,100	28050	4	16.4	8.0
RW6D233*TA	234,900	282,500	27500	4	16.4	8.0

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

Capacity Correction for Medium Temperature Electric Defrost					
SST (Dew)	35°F	25°F	20°F	15°F	10°F
Multiply Capacity by:	1.0375	1	0.98	0.96	0.94

¹ Capacity values adjusted using the Correction Table for Electric Defrost Evaporators.

APPLICATION RATING & ELECTRICAL DATA

MEDIUM TEMPERATURE ELECTRIC DEFROST // 3-PHASE MOTOR // 6 FPI

Model No.	208-230V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW6D033ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6D046ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6D057ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6D068ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6D093ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6D116ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6D142ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW6D175ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW6D189ETA	17.4	20	59.7	60	2	28.9	57.7	24,000
RW6D233ETA	17.4	20	59.7	60	2	28.9	57.7	24,000

Model No.	460V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW6D033GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6D046GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6D057GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6D068GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6D093GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6D116GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6D142GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW6D175GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW6D189GTA	15.0	20	31.1	35	1	30.1	30.1	24,000
RW6D233GTA	15.0	20	31.1	35	1	30.1	30.1	24,000

¹ EcoNet® Enabled Calculation includes a minimum 1 amp for control voltages.

EcoNet® Enabled Units are not powered by Condensing Unit so Defrost Heaters are incorporated into shown MCA/MOPD.

APPLICATION RATING & ELECTRICAL DATA

MEDIUM TEMPERATURE ELECTRIC DEFROST // 3-PHASE MOTOR // 4 FPI

Model No.	BTUH Capacity @ +25F SS T & +10F TD ¹		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/R449A [^]			Total Fan Motor Amps	
RW4D029*TA	30,500	35,800	7,080	1	4.1	2.0
RW4D041*TA	41,600	48,700	7,010	1	4.1	2.0
RW4D050*TA	51,500	61,000	6,875	1	4.1	2.0
RW4D060*TA	61,600	71,600	14,160	2	8.2	4.0
RW4D082*TA	83,600	98,700	14,030	2	8.2	4.0
RW4D103*TA	103,700	122,800	13,750	2	8.2	4.0
RW4D126*TA	126,600	148,800	21,040	3	12.3	6.0
RW4D155*TA	155,800	183,600	20,625	3	12.3	6.0
RW4D167*TA	168,200	200,100	28,050	4	16.4	8.0
RW4D206*TA	207,900	250,000	27,500	4	16.4	8.0

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

Capacity Correction for Medium Temperature Electric Defrost

SST (Dew)	35°F	25°F	20°F	15°F	10°F
Multiply Capacity by:	1.0375	1	0.98	0.96	0.94

¹ Capacity values adjusted using the Correction Table for Electric Defrost Evaporators.

APPLICATION RATING & ELECTRICAL DATA

MEDIUM TEMPERATURE ELECTRIC DEFROST // 3-PHASE MOTOR // 4 FPI

Model No.	208-230V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW4D029ETA	15.0	20	16.4	16.4	1	14.4	14.4	6,000
RW4D041ETA	15.0	20	16.4	16.4	1	14.4	14.4	6,000
RW4D050ETA	15.0	20	16.4	16.4	1	14.4	14.4	6,000
RW4D060ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4D082ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4D103ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4D126ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW4D155ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW4D167ETA	17.4	20	59.7	60	2	28.9	57.7	24,000
RW4D206ETA	17.4	20	59.7	60	2	28.9	57.7	24,000

Model No.	460V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW4D029GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4D041GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4D050GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4D060GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4D082GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4D103GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4D126GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW4D155GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW4D167GTA	15.0	20	31.1	35	1	30.1	30.1	24,000
RW4D206GTA	15.0	20	31.1	35	1	30.1	30.1	24,000

¹ EcoNet® Enabled Calculation includes a minimum 1 amp for control voltages.

EcoNet® Enabled Units are not powered by Condensing Unit so Defrost Heaters are incorporated into shown MCA/MOPD.

APPLICATION RATING & ELECTRICAL DATA

LOW TEMPERATURE ELECTRIC DEFROST // 3-PHASE MOTOR // 6 FPI

Model No.	BTUH Capacity @ -20°F SST & 10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/R449A [^]			Total Fan Motor Amps	
RW6E036*TA	36,400	41,900	7,080	1	4.1	2.0
RW6E047*TA	47,900	54,600	7,010	1	4.1	2.0
RW6E059*TA	59,200	67,900	6,875	1	4.1	2.0
RW6E072*TA	72,500	83,500	14,160	2	8.2	4.0
RW6E096*TA	96,100	109,400	14,030	2	8.2	4.0
RW6E120*TA	120,000	137,200	13,750	2	8.2	4.0
RW6E143*TA	143,600	163,100	21,040	3	12.3	6.0
RW6E179*TA	179,500	206,600	20,625	3	12.3	6.0
RW6E216*TA	216,200	246,100	27,500	4	16.4	8.0

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

Model No.	208-230V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW6E036ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6E047ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6E059ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6E072ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6E096ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6E120ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6E143ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW6E179ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW6E216ETA	17.4	20	59.7	60	2	28.9	57.7	24,000

Model No.	460V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW6E036GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6E047GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6E059GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6E072GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6E096GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6E120GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6E143GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW6E179GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW6E216GTA	15.0	20	31.1	35	1	30.1	30.1	24,000

¹ EcoNet® Enabled Calculation includes a minimum 1 amp for control voltages.

EcoNet® Enabled Units are not powered by Condensing Unit so Defrost Heaters are incorporated into shown MCA/MOPD.

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Electric Defrost Evaporators.

APPLICATION RATING & ELECTRICAL DATA

LOW TEMPERATURE ELECTRIC DEFROST // 3-PHASE MOTOR // 4 FPI

Model No.	BTUH Capacity @ -20°F SST & 10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/R449A [^]			Total Fan Motor Amps	
RW4E038*TA	38,300	43,600	7,010	1	4.1	2.0
RW4E048*TA	48,900	56,000	6,875	1	4.1	2.0
RW4E077*TA	77,300	88,600	14,030	2	8.2	4.0
RW4E097*TA	97,000	111,000	13,750	2	8.2	4.0
RW4E115*TA	115,600	131,200	21,040	3	12.3	6.0
RW4E145*TA	145,700	166,400	20,625	3	12.3	6.0
RW4E182*TA	182,200	206,500	27,500	4	16.4	8.0

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature. [^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

Model No.	208-230V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW4E038ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW4E048ETA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW4E077ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4E097ETA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4E115ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW4E145ETA	15.0	20	45.3	50	1	43.3	43.3	18,000
RW4E182ETA	17.4	20	59.7	60	2	28.9	57.7	24,000

Model No.	460V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW4E038GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4E048GTA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4E077GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4E097GTA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4E115GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW4E145GTA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW4E182GTA	15.0	20	31.1	35	1	30.1	30.1	24,000

¹ EcoNet® Enabled Units are not powered by condensing unit so defrost headers are incorporated into shown MCA/MOPD.

EcoNet® enabled calculations includes a minimum 1 amp for control voltages.

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Electric Defrost Evaporators.

LOW TEMPERATURE ELECTRIC DEFROST

3-PHASE MOTOR W HIGH-STATIC FAN BLADES // 6 FPI

Model No.	BTUH Capacity @ -20°F SST & +10°F TD		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/ R449A^			Total Fan Motor Amps	
RW6E036*HA	36,400	1,900	7,080	1	6.4	3.2
RW6E047*HA	47,900	54,600	7,010	1	6.4	3.2
RW6E059*HA	59,200	67,900	6,875	1	6.4	3.2
RW6E072*HA	72,500	83,500	14,160	2	12.8	6.4
RW6E096*HA	96,100	109,400	14,030	2	12.8	6.4
RW6E120*HA	120,000	137,200	13,750	2	12.8	6.4
RW6E143*HA	143,600	163,100	21,040	3	19.2	9.6
RW6E179*HA	179,500	206,600	20,625	3	19.2	9.6
RW6E216*HA	216,200	246,100	27,500	4	25.6	12.8

Model No.	208-230V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW6E036EHA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6E047EHA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6E059EHA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW6E072EHA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6E096EHA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6E120EHA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW6E143EHA	20.8	25	45.3	50	1	43.3	43.3	18,000
RW6E179EHA	20.8	25	45.3	50	1	43.3	43.3	18,000
RW6E216EHA	27.2	30	59.7	60	2	28.9	57.7	24,000

Model No.	460V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW6E036GHA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6E047GHA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6E059GHA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW6E072GHA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6E096GHA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6E120GHA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW6E143GHA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW6E179GHA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW6E216GHA	15.0	20	31.1	35	2	30.1	30.1	24,000

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

^ R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

High Static Fan Blades are capable of .35" water column external static pressure for duct or air flow accessories.

Models with high static fan blades should not be used with the presence of external static pressure.

LOW TEMPERATURE ELECTRIC DEFROST

3-PHASE MOTOR W/HIGH-STATIC FAN BLADES // 4 FPI

Model No.	BTUH Capacity @ -20°F SST & +10°F TD		CFM	No. of Fans	208-230V/3	460V/3
	R404A/R744 DX (CO ₂)	R407A/R448A/R449A [^]			Total Fan Motor Amps	
RW4E038*HA	38,300	43,600	7,010	1	6.4	3.2
RW4E048*HA	48,900	56,000	6,875	1	6.4	3.2
RW4E077*HA	77,300	88,600	14,030	2	12.8	6.4
RW4E097*HA	97,000	111,000	13,750	2	12.8	6.4
RW4E115*HA	115,600	131,200	21,040	3	19.2	9.6
RW4E145*HA	145,700	166,400	20,625	3	19.2	9.6
RW4E182*HA	182,200	206,500	27,500	4	25.6	12.8

Model No.	208-230V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW4E038EHA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW4E048EHA	15.0	20	16.4	20	1	14.4	14.4	6,000
RW4E077EHA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4E097EHA	15.0	20	30.9	35	1	28.9	28.9	12,000
RW4E115EHA	20.8	25	45.3	50	1	43.3	43.3	18,000
RW4E145EHA	20.8	25	45.3	50	1	43.3	43.3	18,000
RW4E182EHA	27.2	30	59.7	60	2	28.9	57.7	24,000

Model No.	460V/3							Heater Watts
	Base Model		EcoNet® Enabled¹		Heater Amps			
	MCA	MOPD	MCA	MOPD	No. of Circuits	Amps Each Circuit	Total Heater Amps	
RW4E038GHA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4E048GHA	15.0	20	15.0	20	1	7.5	7.5	6,000
RW4E077GHA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4E097GHA	15.0	20	16.1	20	1	15.1	15.1	12,000
RW4E115GHA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW4E145GHA	15.0	20	23.6	25	1	22.6	22.6	18,000
RW4E182GHA	15.0	20	31.1	35	1	30.1	30.1	24,000

¹ EcoNet[®] Enabled Units are not powered by condensing unit so defrost headers are incorporated into shown MCA/MOPD.

EcoNet[®] enabled calculations include a minimum 1 amp for control voltages.

High Static Fan Blades are capable of .35" water column external static pressure for duct or air flow accessories.

Models with high static fan blades should not be used with the presence of external static pressure.

PERFORMANCE & ELECTRICAL DATA

HOT GAS 3-PIPE DEFROST MODELS // 3-PHASE MOTOR // 6 FPI

Model No. RW*H, RW*K	BTUH Capacity @ -20°F SST & 10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3	208-230V/3	460V/3
	R404A	R407A/R448A/ R449A [^]			Total Fan Motor Amps		MCA	MOPD
RW6*036*TA	36,400	41,900	7,080	1	4.1	2.0	15.0	20
RW6*047*TA	47,900	54,600	7,010	1	4.1	2.0	15.0	20
RW6*059*TA	59,200	67,900	6,875	1	4.1	2.0	15.0	20
RW6*072*TA	72,500	83,500	14,160	2	8.2	4.0	15.0	20
RW6*096*TA	96,100	109,400	14,030	2	8.2	4.0	15.0	20
RW6*120*TA	120,000	137,200	13,750	2	8.2	4.0	15.0	20
RW6*143*TA	143,600	163,100	21,040	3	12.3	6.0	15.0	20
RW6*179*TA	179,500	206,600	20,625	3	12.3	6.0	15.0	20
RW6*216*TA	216,200	246,100	27,500	4	16.4	8.0	17.4	20

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925


¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

Model No. RW*H	Electric Drain Pan Heater Amps		Heater Watts
	208-230V/1	460V/1	
RW6H036*TA	8.3	4.3	2,000
RW6H047*TA	8.3	4.3	2,000
RW6H059*TA	8.3	4.3	2,000
RW6H072*TA	16.7	8.7	4,000
RW6H096*TA	16.7	8.7	4,000
RW6H120*TA	16.7	8.7	4,000
RW6H143*TA	25.0	13.0	6,000
RW6H179*TA	25.0	13.0	6,000
RW6H216*TA	33.3	17.4	8,000

* See Notes on Page 17

HOT GAS 3-PIPE MODEL

The system uses 3 pipes — 1 for liquid line, 1 for suction line and 1 for hot gas. The hot gas is taken from the discharge line, between the compressor and the condenser, through a hot-gas solenoid valve to the distributor tee then through the coil.

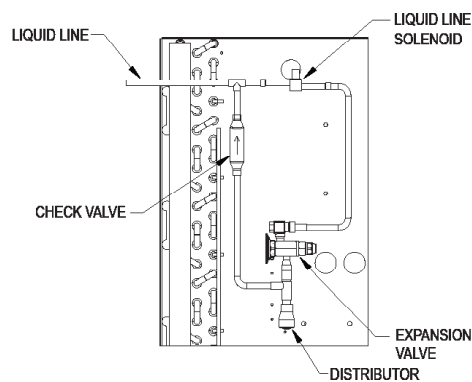

PERFORMANCE & ELECTRICAL DATA

HOT GAS 3-PIPE DEFROST MODELS // 3-PHASE MOTOR // 4 FPI

Model No. RW*H, RW*K	BTUH Capacity @ -20°F SST & 10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3	208-230V/3	460V/3
	R404A	R407A/R448A/ R449A [^]			Total Fan Motor Amps		MCA	MOPD
RW4*038*TA	38,300	43,600	7,010	1	4.1	2.0	15.0	20
RW4*048*TA	48,900	56,000	6,875	1	4.1	2.0	15.0	20
RW4*077*TA	77,300	88,600	14,030	2	8.2	4.0	15.0	20
RW4*097*TA	97,000	111,000	13,750	2	8.2	4.0	15.0	20
RW4*115*TA	115,600	131,200	21,040	3	12.3	6.0	15.0	20
RW4*145*TA	145,700	166,400	20,625	3	12.3	6.0	15.0	20
RW4*182*TA	182,200	206,500	27,500	4	16.4	8.0	17.4	20

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

Model No. RW*H	Electric Drain Pan Heater Amps		Heater Watts
	208-230V/1	460V/1	
RW4H038*TA	8.3	4.3	2,000
RW4H048*TA	8.3	4.3	2,000
RW4H077*TA	16.7	8.7	4,000
RW4H097*TA	16.7	8.7	4,000
RW4H115*TA	25.0	13.0	6,000
RW4H145*TA	25.0	13.0	6,000
RW4H182*TA	33.3	17.4	8,000

* Each asterisk represents a variable character based on defrost and voltage ordered.

See page 4 for nomenclature.

Hot Gas 3-Pipe Version (H - Hot Gas Defrost 3-Pipe with Electric Drain Pan Heater, K - Hot Gas Defrost 3-Pipe with Hot Gas Drain Pan).

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

High Static Fan Blades are capable of .35" water column external static pressure for duct or air flow accessories.

Models with high static fan blades should not be used with the presence of external static pressure.

PERFORMANCE & ELECTRICAL DATA

HOT GAS 3-PIPE DEFROST MODELS // 3-PHASE MOTOR W/HIGH-STATIC FAN BLADES // 6 FPI

Model No. RW*H, RW*K	BTUH Capacity @ -20°F SST & +10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3	208-230V/3	460V/3
	R404A	R407A/R448A/R449A [^]			Total Fan Motor Amps		MCA	MOPD
RW6*036*HA	36,400	41,900	7,080	1	6.4	3.2	15.0	20
RW6*047*HA	47,900	54,600	7,010	1	6.4	3.2	15.0	20
RW6*059*HA	59,200	67,900	6,875	1	6.4	3.2	15.0	20
RW6*072*HA	72,500	83,500	14,160	2	12.8	6.4	15.0	20
RW6*096*HA	96,100	109,400	14,030	2	12.8	6.4	15.0	20
RW6*120*HA	120,000	137,200	13,750	2	12.8	6.4	15.0	20
RW6*143*HA	143,600	163,100	21,040	3	19.2	9.6	20.8	25
RW6*179*HA	179,500	206,600	20,625	3	19.2	9.6	20.8	25
RW6*216*HA	216,200	246,100	27,500	4	25.6	12.8	27.2	30

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925


¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

Model No.	Electric Drain Pan Heater Amps		Heater Watts
	208-230V/1	460V/1	
RW6H036*HA	8.3	4.3	2,000
RW6H047*HA	8.3	4.3	2,000
RW6H059*HA	8.3	4.3	2,000
RW6H072*HA	16.7	8.7	4,000
RW6H096*HA	16.7	8.7	4,000
RW6H120*HA	16.7	8.7	4,000
RW6H143*HA	25.0	13.0	6,000
RW6H179*HA	25.0	13.0	6,000
RW6H216*HA	33.3	17.4	8,000

* See Notes on Page 19

HOT GAS REVERSE CYCLE 2-PIPE MODEL

A changeover valve is located in the discharge suction line of the compressor, so that when defrost is required, the valve changes over from the normal refrigeration flow so that the discharged gas flows into the suction connection and bypasses TX valve.

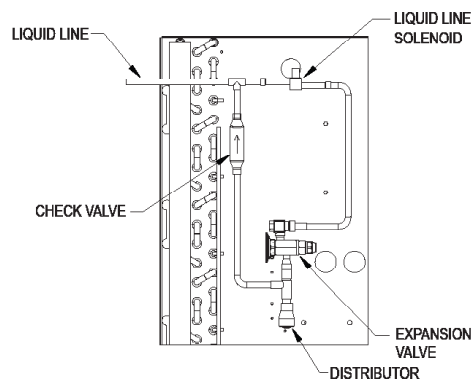

PERFORMANCE & ELECTRICAL DATA

HOT GAS 3-PIPE DEFROST MODELS // 3-PHASE MOTOR W/HIGH-STATIC FAN BLADES // 4 FPI

Model No. RW*H, RW*K	BTUH Capacity @ -20°F SST & +10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3	208-230V/3	460V/3
	R404A	R407A/R448A/R449A [^]			Total Fan Motor Amps		MCA	MOPD
RW4*038*HA	38,300	43,600	7,010	1	6.4	3.2	15.0	20
RW4*048*HA	48,900	56,000	6,875	1	6.4	3.2	15.0	20
RW4*077*HA	77,300	88,600	14,030	2	12.8	6.4	15.0	20
RW4*097*HA	97,000	111,000	13,750	2	12.8	6.4	15.0	20
RW4*115*HA	115,600	131,200	21,040	3	19.2	9.6	20.8	25
RW4*145*HA	145,700	166,400	20,625	3	19.2	9.6	20.8	25
RW4*182*HA	182,200	206,500	27,500	4	25.6	12.8	27.2	30

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

Model No.	Electric Drain Pan Heater Amps		Heater Watts
	208-230V/1	460V/1	
RW4H038*HA	8.3	4.3	2,000
RW4H048*HA	8.3	4.3	2,000
RW4H077*HA	16.7	8.7	4,000
RW4H097*HA	16.7	8.7	4,000
RW4H115*HA	25.0	13.0	6,000
RW4H145*HA	25.0	13.0	6,000
RW4H182*HA	33.3	17.4	8,000

* Each asterisk represents a variable character based on defrost and voltage ordered.

Hot Gas 3-Pipe Version (H - Hot Gas Defrost 3-Pipe with Electric Drain Pan Heater, K - Hot Gas Defrost 3-Pipe with Hot Gas Drain Pan).

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F. See page 4 for nomenclature.

High Static Fan Blades are capable of .35" water column external static pressure for duct or air flow accessories.

Models with high static fan blades should not be used with the presence of external static pressure.

PERFORMANCE & ELECTRICAL DATA

HOT GAS REVERSE CYCLE DEFROST MODELS // 3-PHASE MOTOR // 6 FPI

Model No. RW*G, RW*L	BTUH Capacity @ -20°F SST & 10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3	208-230V/3	460V/3
	R404A	R407A/R448A/R449A [^]			Total Fan Motor Amps		MCA	MOPD
RW6*036*TA	36,400	41,900	7,080	1	4.1	2.0	15.0	20
RW6*047*TA	47,900	54,600	7,010	1	4.1	2.0	15.0	20
RW6*059*TA	59,200	67,900	6,875	1	4.1	2.0	15.0	20
RW6*072*TA	72,500	83,500	14,160	2	8.2	4.0	15.0	20
RW6*096*TA	96,100	109,400	14,030	2	8.2	4.0	15.0	20
RW6*120*TA	120,000	137,200	13,750	2	8.2	4.0	15.0	20
RW6*143*TA	143,600	163,100	21,040	3	12.3	6.0	15.0	25
RW6*179*TA	179,500	206,600	20,625	3	12.3	6.0	15.0	25
RW6*216*TA	216,200	246,100	27,500	4	16.4	8.0	17.4	30

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

Model No.	Electric Drain Pan Heater Amps		Heater Watts
	208-230V/1	460V/1	
RW6G036*TA	8.3	4.3	2,000
RW6G047*TA	8.3	4.3	2,000
RW6G059*TA	8.3	4.3	2,000
RW6G072*TA	16.7	8.7	4,000
RW6G096*TA	16.7	8.7	4,000
RW6G120*TA	16.7	8.7	4,000
RW6G143*TA	25.0	13.0	6,000
RW6G179*TA	25.0	13.0	6,000
RW6G216*TA	33.3	17.4	8,000

* Each asterisk represents a variable character based on defrost and voltage ordered. See page 4 for nomenclature.

Reverse Cycle (2-Pipe) Version (G: Hot Gas Defrost Reverse Cycle with Electric Drain Pan Heater, L: Hot Gas Defrost Reverse Cycle with Hot Gas Drain Pan).

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

PERFORMANCE & ELECTRICAL DATA

HOT GAS REVERSE CYCLE DEFROST MODELS // 3-PHASE MOTOR // 4 FPI

Model No. RW*G, RW*L	BTUH Capacity @ -20°F SST & 10°F TD ¹		CFM	No. of Fans	208-230V/3	460V/3	208-230V/3	460V/3
	R404A	R407A/R448A/R449A [^]			Total Fan Motor Amps		MCA	MOPD
RW4*038*TA	38,300	43,600	7,010	1	4.1	2.0	15.0	20
RW4*048*TA	48,900	56,000	6,875	1	4.1	2.0	15.0	20
RW4*077*TA	77,300	88,600	14,030	2	8.2	4.0	15.0	25
RW4*097*TA	97,000	111,000	13,750	2	8.2	4.0	15.0	25
RW4*115*TA	115,600	131,200	21,040	3	12.3	6.0	15.0	25
RW4*145*TA	145,700	166,400	20,625	3	12.3	6.0	15.0	25
RW4*182*TA	182,200	206,500	27,500	4	16.4	8.0	17.4	30

Capacity Correction for Low Temp Electric and Hot Gas Defrost

SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

Model No.	Electric Drain Pan Heater Amps		Heater Watts
	208-230V/1	460V/1	
RW4G038*TA	8.3	4.3	2,000
RW4G048*TA	8.3	4.3	2,000
RW4G077*TA	16.7	8.7	4,000
RW4G097*TA	16.7	8.7	4,000
RW4G115*TA	25.0	13.0	6,000
RW4G145*TA	25.0	13.0	6,000
RW4G182*TA	33.3	17.4	8,000

* Each asterisk represents a variable character based on defrost and voltage ordered. See page 4 for nomenclature.

Reverse Cycle (2-Pipe) Version (G: Hot Gas Defrost Reverse Cycle with Electric Drain Pan Heater, L: Hot Gas Defrost Reverse Cycle with Hot Gas Drain Pan).

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

PERFORMANCE AND ELECTRICAL DATA

HOT GAS REVERSE CYCLE DEFROST // 3-PHASE MOTOR W/HIGH-STATIC FAN BLADES

Model No. RW*G, RW*L		BTUH Capacity @ -20°F SST & +10°F TD ¹		CFM	No. of Fans	208- 230V/3	460V/3	208-230V/3		460V/3	
		R404A	R407A/R448A/R449A [^]			Total Fan Motor AMPS		MCA	MOPD	MCA	MOPD
6 FPI	RW6*036*HA	36,400	41,900	7,080	1	6.4	3.2	15.0	20	15.0	20
	RW6*047*HA	47,900	54,600	7,010	1	6.4	3.2	15.0	20	15.0	20
	RW6*059*HA	59,200	67,900	6,875	1	6.4	3.2	15.0	20	15.0	20
	RW6*072*HA	72,500	83,500	14,160	2	12.8	6.4	15.0	20	15.0	20
	RW6*096*HA	96,100	109,400	14,030	2	12.8	6.4	15.0	20	15.0	20
	RW6*120*HA	120,000	137,200	13,750	2	12.8	6.4	15.0	20	15.0	20
	RW6*143*HA	143,600	163,100	21,040	3	19.2	9.6	20.8	25	15.0	20
	RW6*179*HA	179,500	206,600	20,625	3	19.2	9.6	20.8	25	15.0	20
	RW6*216*HA	216,200	246,100	27,500	4	25.6	12.8	27.2	30	15.0	20
4 FPI	RW4*038*HA	38,300	43,600	7,010	1	6.4	3.2	15.0	20	15.0	20
	RW4*048*HA	48,900	56,000	6,875	1	6.4	3.2	15.0	20	15.0	20
	RW4*077*HA	77,300	88,600	14,030	2	12.8	6.4	15.0	25	15.0	20
	RW4*097*HA	97,000	111,000	13,750	2	12.8	6.4	15.0	25	15.0	20
	RW4*115*HA	115,600	131,200	21,040	3	19.2	9.6	20.8	25	15.0	20
	RW4*145*HA	145,700	166,400	20,625	3	19.2	9.6	20.8	25	15.0	20
	RW4*182*HA	182,200	206,500	27,500	4	25.6	12.8	27.2	30	15.0	20

Model No. RW*H		208-230V/1	460V/1	Heater Watts
		Electric Drain Pan Heater Amps		
6 FPI	RW6G036*HA	8.3	4.3	2,000
	RW6G047*HA	8.3	4.3	2,000
	RW6G059*HA	8.3	4.3	2,000
	RW6G072*HA	16.7	8.7	4,000
	RW6G096*HA	16.7	8.7	4,000
	RW6G120*HA	16.7	8.7	4,000
	RW6G143*HA	25.0	13.0	6,000
	RW6G179*HA	25.0	13.0	6,000
	RW6G216*HA	33.3	17.4	8,000
4 FPI	RW4G038*HA	8.3	4.3	2,000
	RW4G048*HA	8.3	4.3	2,000
	RW4G077*HA	16.7	8.7	4,000
	RW4G097*HA	16.7	8.7	4,000
	RW4G115*HA	25.0	13.0	6,000
	RW4G145*HA	25.0	13.0	6,000
	RW4G182*HA	33.3	17.4	8,000

* Each asterisk represents a variable character based on defrost and voltage ordered.

Hot Gas 3-Pipe Version (H - Hot Gas Defrost 3-Pipe with Electric Drain Pan Heater, K - Hot Gas Defrost 3-Pipe with Hot Gas Drain Pan).

[^] R407A, R448A and R449A are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

High static models are capable of .35" water column external static pressure for duct or air flow accessories. Models with high static fan blades should not be used without the presence of external static pressure. See page 4 for nomenclature.

Capacity Correction for Low Temp Electric and Hot Gas Defrost					
SST (Dew)	0°F	-10°F	-20°F	-30°F	-40°F
Multiply Capacity by:	1.075	1.0375	1	0.9625	0.925

¹ Capacity values adjusted using the Correction Table for Low Temp Electric and Hot Gas Defrost Evaporators.

DISTRIBUTOR NOZZLES & EXPANSION VALVES

AIR DEFROST DEFROST MODELS

Model No.		Nozzle @ Liq. Temp.		TXV [^] @ Liq. Temp.		EEV @ Liq. Temp.		No. of Circuits
		50°F	100°F	50°F	100°F	50°F	100°F	
6 FPI - R404A	RW6A034*TA	G#1-1/2	G#4	SBFSE-B-C	SBFSE-C-C	SER-C	SER-C	6
	RW6A047*TA	G#1-1/2	G#5	SBFSE-C-C	OSE-6-C	SER-C	SER-C	6
	RW6A058*TA	E#2	E#6	OSE-6-C	OSE-6-C	SER-C	SER-D	12
	RW6A069*TA	E#2-1/2	E#10	OSE-6-C	OSE-6-C	SER-C	SER-D	9
	RW6A094*TA	C#3	C#12	OSE-6-C	OSE-9-C	SER-D	SER-D	18
	RW6A117*TA	C#4	C#15	OSE-9-C	OSE-9-C	SER-D	SERI-F	18
	RW6A143*TA	C#5	C#20	OSE-9-C	OSE-12-C	SER-D	SERI-F	18
	RW6A176*TA	C#6	C#25	OSE-12-C	OSE-21-C	SERI-F	SERI-G	24
	RW6A190*TA	A#8	A#25	OSE-12-C	OSE-21-C	SERI-F	SERI-G	27
	RW6A234*TA	A#10	A#30	OSE-12-C	OSE-21-C	SERI-F	SERI-G	36
6 FPI - R407A/R448A/R449A [†]	RW6A034*TA	G#1-1/2	G#4	SBFDE-B-C	SBFDE-C-C	SER-B	SER-C	6
	RW6A047*TA	G#1-1/2	G#5	SBFDE-C-C	SBFDE-C-C	SER-C	SER-C	6
	RW6A058*TA	E#2	E#6	SBFDE-C-C	EBSDE-7-C	SER-C	SER-C	12
	RW6A069*TA	E#2-1/2	E#8	SBFDE-C-C	EBSDE-7-C	SER-C	SER-D	9
	RW6A094*TA	C#4	C#12	EBSDE-7-C	EBSDE-10-C	SER-D	SER-D	18
	RW6A117*TA	C#4	C#15	EBSDE-7-C	ODE-12-C	SER-D	SERI-F	18
	RW6A143*TA	C#5	C#17	EBSDE-10-C	ODE-12-C	SER-D	SERI-F	18
	RW6A176*TA	C#6	C#20	EBSDE-12-C	ODE-17-C	SERI-F	SERI-F	24
	RW6A190*TA	A#8	A#25	EBSDE-12-C	ODE-17-C	SERI-F	SERI-G	27
	RW6A234*TA	A#10	A#30	EBSDE-17-C	ODE-28-C	SERI-F	SERI-G	36

The distributor lines are 1/4" tube & 31" long.

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] TXV selections are based on +25°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

[†] SBFDE, ODE, and EBSDE expansion valves are compatible with expansion valves are compatible with R407A, R448A and R449A/B.

For other valves, follow manufacturer's selection guidelines.

Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

DISTRIBUTOR NOZZLES & EXPANSION VALVES

MEDIUM TEMPERATURE ELECTRIC DEFROST // 6 FPI

Model No.		Nozzle @ Liquid Temp		TXV @ Liquid Temp		EEV @ Liquid Temp		No. of Circuits
		50°F	100°F	50°F	100°F	50°F	100°F	
R404A	RW6D033*TA	G#1-1/2	G#4	SBFSE-B-C	SBFSE-C-C	SER-C	SER-C	6
	RW6D046*TA	G#1-1/2	G#5	SBFSE-B-C	OSE-6-C	SER-C	SER-C	6
	RW6D057*TA	E#2	E#6	OSE-6-C	OSE-6-C	SER-C	SER-D	12
	RW6D068*TA	E#2-1/2	E#10	OSE-6-C	OSE-6-C	SER-C	SER-D	9
	RW6D093*TA	C#3	C#12	OSE-6-C	OSE-9-C	SER-D	SER-D	18
	RW6D116*TA	C#4	C#15	OSE-9-C	OSE-9-C	SER-D	SERI-F	18
	RW6D142*TA	C#5	C#20	OSE-9-C	OSE-12-C	SER-D	SERI-F	18
	RW6D175*TA	C#6	C#25	OSE-12-C	OSE-21-C	SERI-F	SERI-G	24
	RW6D189*TA	A#8	A#25	OSE-12-C	OSE-21-C	SERI-F	SERI-G	27
	RW6D233*TA	A#10	A#30	OSE-12-C	OSE-21-C	SERI-F	SERI-G	36
R407A/R407C/R448A/R449A†	RW6D033*TA	G#1-1/2	G#4	SBFDE-B-C	SBFDE-C-C	SER-C	SER-C	6
	RW6D046*TA	G#1-1/2	G#5	SBFDE-C-C	SBFDE-C-C	SER-C	SER-C	6
	RW6D057*TA	E#2	E#6	SBFDE-C-C	EBSDE-7-C	SER-C	SER-C	12
	RW6D068*TA	E#2-1/2	E#8	SBFDE-C-C	EBSDE-7-C	SER-C	SER-D	9
	RW6D093*TA	C#4	C#12	EBSDE-7-C	EBSDE-10-C	SER-D	SER-D	18
	RW6D116*TA	C#4	C#15	EBSDE-7-C	ODE-12-C	SER-D	SERI-F	18
	RW6D142*TA	C#5	C#17	EBSDE-10-C	ODE-12-C	SER-D	SERI-F	18
	RW6D175*TA	C#6	C#25	EBSDE-12-C	ODE-17-C	SERI-F	SERI-F	24
	RW6D189*TA	A#8	A#25	EBSDE-12-C	ODE-17-C	SERI-F	SERI-G	27
	RW6D233*TA	A#10	A#30	EBSE-17-C	ODE-28-C	SERI-F	SERI-G	36

The distributor lines are 1/4" tube & 31" long.

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

^ TXV selections are based on +25°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

† SBFDE, ODE, and EBSDE expansion valves are compatible with expansion valves are compatible with R407A, R448A and R449A/B.

For other valves, follow manufacturer's selection guidelines. Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

DISTRIBUTOR NOZZLES & EXPANSION VALVES

MEDIUM TEMPERATURE ELECTRIC DEFROST // 4 FPI

Model No.		Nozzle @ Liquid Temp		TXV @ Liquid Temp		EEV @ Liquid Temp		No. of Circuits
		50°F	100°F	50°F	100°F	50°F	100°F	
R404A	RW4D029*TA	G#1-1/2	G#4	SBFSE-B-C	SBFSE-C-C	SER-C	SER-C	6
	RW4D041*TA	G#1-1/2	G#5	SBFSE-B-C	OSE-6-C	SER-C	SER-C	6
	RW4D050*TA	E#2	E#6	OSE-6-C	OSE-6-C	SER-C	SER-D	12
	RW4D060*TA	E#2-1/2	E#10	OSE-6-C	OSE-6-C	SER-C	SER-D	9
	RW4D082*TA	C#3	C#12	OSE-6-C	OSE-9-C	SER-D	SER-D	18
	RW4D103*TA	C#4	C#15	OSE-9-C	OSE-9-C	SER-D	SERI-F	18
	RW4D126*TA	C#5	C#20	OSE-9-C	OSE-12-C	SER-D	SERI-F	18
	RW4D155*TA	C#6	C#25	OSE-12-C	OSE-21-C	SERI-F	SERI-G	24
	RW4D167*TA	A#8	A#25	OSE-12-C	OSE-21-C	SERI-F	SERI-G	27
	RW4D206*TA	A#10	A#30	OSE-12-C	OSE-21-C	SERI-F	SERI-G	36
R407A/R407C/R448A/R449A†	RW4D029*TA	G#1-1/2	G#4	SBFDE-B-C	SBFDE-C-C	SER-C	SER-C	6
	RW4D041*TA	G#1-1/2	G#5	SBFDE-C-C	SBFDE-C-C	SER-C	SER-C	6
	RW4D050*TA	E#2	E#6	SBFDE-C-C	EBSDE-7-C	SER-C	SER-D	12
	RW4D060*TA	E#2-1/2	E#8	SBFDE-C-C	EBSDE-7-C	SER-C	SER-D	9
	RW4D082*TA	C#4	C#12	EBSDE-7-C	EBSDE-10-C	SER-D	SER-D	18
	RW4D103*TA	C#4	C#15	EBSDE-7-C	ODE-12-C	SER-D	SERI-F	18
	RW4D126*TA	C#5	C#17	EBSDE-10-C	ODE-12-C	SER-D	SERI-F	18
	RW4D155*TA	C#6	C#20	EBSDE-12-C	ODE-17-C	SERI-F	SERI-G	24
	RW4D167*TA	A#8	A#25	EBSDE-12-C	ODE-17-C	SERI-F	SERI-G	27
	RW4D206*TA	A#10	A#30	EBSDE-17-C	ODE-28-C	SERI-F	SERI-G	36

The distributor lines are 1/4" tube & 31" long.

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

^ TXV selections are based on +25°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

† SBFDE, ODE, and EBSDE expansion valves are compatible with expansion valves are compatible with R407A, R448A and R449A/B.

For other valves, follow manufacturer's selection guidelines. Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

DISTRIBUTOR NOZZLES & EXPANSION VALVES

LOW TEMPERATURE ELECTRIC DEFROST MODELS

Model No.		Nozzle @ Liq. Temp.		TXV [^] @ Liq. Temp.		EEV @ Liq. Temp.		No. of Circuits
		50°F	100°F	50°F	100°F	50°F	100°F	
6 FPI - R404A	RW6E036**A	E#3	E#8	SBFSE-C-Z	EBSSE-6-Z	SER-C	SER-C	9
	RW6E047**A	E#4	E#10	OSE-6-Z	EBSSE-7-1/2-Z	SER-C	SER-C	9
	RW6E059**A	E#5	E#12	OSE-6-Z	EBSSE-10-Z	SER-C	SER-D	12
	RW6E072**A	C#6	C#17	OSE-6-Z	EBSSE-10-Z	SER-C	SER-D	18
	RW6E096**A	C#10	C#20	OSE-9-Z	EBSSE-13-Z	SER-D	SER-D	18
	RW6E120**A	C#12	C#25	OSE-12-Z	OSE-21-C	SER-D	SERI-F	24
	RW6E143**A	A#15	A#35	OSE-12-Z	OSE-30-C	SER-D	SERI-F	27
	RW6E179**A	A#17	A#40	OSE-21-Z	OSE-30-C	SERI-F	SERI-G	36
	RW6E216**A	A#20	A#50	OSE-35-Z	OSE-45-C	SERI-F	SERI-G	36
4 FPI - R404A	RW4E038**A	E#3	E#8	SBFSE-C-Z	OSE-6-Z	SER-C	SER-C	9
	RW4E048**A	E#4	E#12	OSE-6-Z	OSE-6-Z	SER-C	SER-C	12
	RW4E077**A	C#8	C#17	OSE-9-Z	OSE-12-Z	SER-C	SER-D	18
	RW4E097**A	C#10	C#20	OSE-9-Z	OSE-12-Z	SER-D	SER-D	24
	RW4E115**A	A#12	A#30	OSE-12-Z	OSE-21-Z	SER-D	SERI-F	27
	RW4E145**A	A#15	A#35	OSE-12-Z	OSE-30-Z	SER-D	SERI-F	36
	RW4E182**A	A#20	A#40	OSE-21-Z	OSE-30-Z	SERI-F	SERI-G	36
6 FPI - R407A/R448A/R449A [†]	RW6E036**A	E#2-1/2	E#6	SBFDE-C-Z	ODE-7-Z	SER-B	SER-C	9
	RW6E047**A	E#4	E#8	EBSDE-7-Z	ODE-12-Z	SER-C	SER-C	9
	RW6E059**A	E#5	E#12	EBSDE-7-Z	ODE-12-Z	SER-C	SER-D	12
	RW6E072**A	C#6	C#115	EBSDE-10-Z	ODE-12-Z	SER-C	SER-D	18
	RW6E096**A	C#10	C#17	ODE-12-Z	ODE-17-Z	SER-D	SER-D	18
	RW6E120**A	C#12	C#25	ODE-17-Z	ODE-28-Z	SER-D	SER-D	24
	RW6E143**A	A#15	A#30	ODE-17-Z	ODE-28-Z	SER-D	SERI-F	27
	RW6E179**A	A#17	A#35	ODE-28-Z	ODE-40-Z	SERI-F	SERI-G	36
	RW6E216**A	A#20	A#40	ODE-28-Z	ODE-45-Z	SERI-F	SERI-G	36
4 FPI - R407A/R448A/R449A [†]	RW4E038**A	E#3	E#6	SBFDE-C-Z	ODE-7-Z	SER-C	SER-C	9
	RW4E048**A	E#4	E#8	SBFDE-C-Z	ODE-7-Z	SER-C	SER-C	12
	RW4E077**A	C#6	C#15	ODE-12-Z	ODE-12-Z	SER-C	SER-D	18
	RW4E097**A	C#8	C#17	ODE-12-Z	ODE-17-Z	SER-D	SER-D	24
	RW4E115**A	A#12	A#20	ODE-17-Z	ODE-28-Z	SER-D	SER-D	27
	RW4E145**A	A#15	A#30	ODE-17-Z	ODE-28-Z	SER-D	SERI-F	36
	RW4E182**A	A#17	A#35	ODE-28-Z	ODE-40-Z	SERI-F	SERI-G	36

The distributor lines are 1/4" tube & 31" long.

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] TXV selections are based on -20°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

[†] SBFDE, ODE, and EBSDE expansion valves are compatible with expansion valves are compatible with R407A, R448A and R449A/B. For other valves, follow manufacturer's selection guidelines. Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

DISTRIBUTOR NOZZLES & EXPANSION VALVES

HOT GAS DEFROST MODELS

Model No. RW*H, RW*G, RW*K, RW*L		Nozzle @ Liq. Temp.		TXV [^] @ Liq. Temp.		EEV @ Liq. Temp.		No. of Circuits
		50°F	100°F	50°F	100°F	50°F	100°F	
6 FPI	RW6*036**A	E#3	E#8	SBFSE-C-Z	EBSSE-6-Z	SER-C	SER-C	9
	RW6*047**A	E#4	E#10	OSE-6-Z	EBSSE-7-1/2-Z	SER-C	SER-C	9
	RW6*059**A	E#5	E#12	OSE-6-Z	EBSSE-10-Z	SER-C	SER-D	12
	RW6*072**A	C#6	C#17	OSE-6-Z	EBSSE-10-Z	SER-C	SER-D	18
	RW6*096**A	C#10	C#20	OSE-9-Z	EBSSE-13-Z	SER-D	SER-D	18
	RW6*120**A	C#12	C#25	OSE-12-Z	OSE-21-C	SER-D	SERI-F	24
	RW6*143**A	A#15	A#35	OSE-12-Z	OSE-30-C	SER-D	SERI-F	27
	RW6*179**A	A#17	A#40	OSE-21-Z	OSE-30-C	SERI-F	SERI-G	36
	RW6*216**A	A#20	A#50	OSE-35-Z	OSE-45-C	SERI-F	SERI-G	36
4 FPI	RW4*038**A	E#3	E#8	SBFSE-C-Z	OSE-6-Z	SER-C	SER-C	9
	RW4*048**A	E#4	E#12	OSE-6-Z	OSE-6-Z	SER-C	SER-C	12
	RW4*077**A	C#8	C#17	OSE-9-Z	OSE-12-Z	SER-C	SER-D	18
	RW4*097**A	C#10	C#20	OSE-9-Z	OSE-12-Z	SER-D	SER-D	24
	RW4*115**A	A#12	A#30	OSE-12-Z	OSE-21-Z	SER-D	SERI-F	27
	RW4*145**A	A#15	A#35	OSE-12-Z	OSE-30-Z	SER-D	SERI-F	36
	RW4*182**A	A#20	A#40	OSE-21-Z	OSE-30-Z	SERI-F	SERI-G	36
6 FPI - R407A/R448A/R449A [†]	RW6*036**A	E#2-1/2	E#6	SBFDE-C-Z	ODE-7-Z	SER-B	SER-C	9
	RW6*047**A	E#4	E#8	EBSDE-7-Z	ODE-12-Z	SER-C	SER-C	9
	RW6*059**A	E#5	E#12	EBSDE-7-Z	ODE-12-Z	SER-C	SER-C	12
	RW6*072**A	C#6	C#15	EBSDE-10-Z	ODE-12-Z	SER-C	SER-D	18
	RW6*096**A	C#8	C#17	ODE-12-Z	ODE-17-Z	SER-D	SER-D	18
	RW6*120**A	C#12	C#25	ODE-17-Z	ODE-28-Z	SER-D	SER-D	24
	RW6*143**A	A#15	A#30	ODE-17-Z	ODE-28-Z	SER-D	SERI-F	27
	RW6*179**A	A#17	A#35	ODE-28-Z	ODE-40-Z	SERI-F	SERI-G	36
	RW6*216**A	A#20	A#40	ODE-28-Z	ODE-45-Z	SERI-F	SERI-G	36
4 FPI - R407A/R448A/R449A [†]	RW4*038**A	E#3	E#6	SBFDE-C-Z	ODE-7-Z	SER-C	SER-C	9
	RW4*048**A	E#4	E#8	SBFDE-C-Z	ODE-7-Z	SER-C	SER-C	12
	RW4*077**A	C#6	C#15	ODE-12-Z	ODE-12-Z	SER-C	SER-D	18
	RW4*097**A	C#8	C#17	ODE-12-Z	ODE-17-Z	SER-D	SER-D	24
	RW4*115**A	A#12	A#20	ODE-17-Z	ODE-28-Z	SER-D	SER-D	27
	RW4*145**A	A#15	A#30	ODE-17-Z	ODE-28-Z	SER-D	SERI-F	36
	RW4*182**A	A#17	A#35	ODE-28-Z	ODE-40-Z	SERI-F	SERI-G	36

The distributor lines are 1/4" tube & 31" long.

For other valves, follow manufacturer's selection guidelines.

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] TXV selections are based on -20°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

[†] SBFDE, ODE, and EBSDE expansion valves are compatible with expansion valves are compatible with R407A, R448A and R449A/B.

Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

SPECIFICATIONS

AIR DEFROST MODELS // 3-PHASE MOTOR

Model No.		Fan Diam. (In.)	Motor Data			Refrigerant Connections		No. of Hanger Slot Locations	Fig.	Unit Dimensions (In.)			Approx. Unit Wt. (Lbs.)
			Motor Qty.	HP	RPM	Liquid Line [^]	Suction			L	W	H	
6 FPI	RW6A034*TA	30	1	1	850	1/2	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6A047*TA	30	1	1	850	1/2	1-3/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6A058*TA	30	1	1	850	5/8	1-5/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6A069*TA	30	2	1	850	5/8	1-5/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6A094*TA	30	2	1	850	7/8	2-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6A117*TA	30	2	1	850	7/8	2-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6A143*TA	30	3	1	850	7/8	2-1/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6A176*TA	30	3	1	850	1-1/8	2-1/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6A190*TA	30	4	1	850	1-1/8	2-1/8	10	4	179-9/16	27-3/8	49-1/4	1,050
	RW6A234*TA	30	4	1	850	1-1/8	2-1/8	10	4	179-9/16	27-3/8	49-1/4	1,050

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] For units with mounted TXV components. See Nozzle/TXV table for distributor connection size when TXV is field installed.

For dimensional distance between hanger slots, consult model's corresponding dimension drawing. Hanger slots are 1" deep x 1/2" wide.

Drain is 1-1/4" NPT for all models.

SPECIFICATIONS

MEDIUM TEMPERATURE ELECTRIC DEFROST MODELS

Model No.		Fan Diam. (In.)	Motor Data			Refrigerant Connections		No. of Hanger Slot Loc.	Figure	Unit Dimensions (In.)			Approx. Unit Wt. (Lbs.)
			Motor Qty.	HP	RPM	Liquid Line [^]	Suction			L	W	H	
6 FPI	RW6D033*TA	30	1	1	850	1/2	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6D046*TA	30	1	1	850	1/2	1-3/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6D057*TA	30	1	1	850	5/8	1-5/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6D068*TA	30	2	1	850	5/8	1-5/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6D093*TA	30	2	1	850	7/8	2-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6D116*TA	30	2	1	850	7/8	2-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6D142*TA	30	3	1	850	7/8	2-1/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6D175*TA	30	3	1	850	1-1/8	2-1/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6D189*TA	30	4	1	850	1-1/8	2-1/8	10	4	179-7/8	27-3/8	49-1/4	1,050
	RW6D233*TA	30	4	1	850	1-1/8	2-1/8	10	4	179-7/8	27-3/8	49-1/4	1,050
4 FPI	RW4D029*TA	30	1	1	850	1/2	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4D041*TA	30	1	1	850	1/2	1-3/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4D050*TA	30	1	1	850	5/8	1-5/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4D060*TA	30	2	1	850	5/8	1-5/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4D082*TA	30	2	1	850	7/8	2-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4D103*TA	30	2	1	850	7/8	2-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4D126*TA	30	3	1	850	7/8	2-1/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW4D155*TA	30	3	1	850	1-1/8	2-1/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW4D167*TA	30	4	1	850	1-1/8	2-1/8	10	4	179-7/8	27-3/8	49-1/4	1,050
	RW4D206*TA	30	4	1	850	1-1/8	2-1/8	10	4	179-7/8	27-3/8	49-1/4	1,050

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] For units with mounted TXV components. See Nozzle/TXV table for distributor connection size when TXV is field installed.

For dimensional distance between hanger slots, consult model's corresponding dimension drawing. Hanger slots are 1" deep x 1/2" wide.

Drain is 1-1/4" NPT for all models.

SPECIFICATIONS

LOW TEMPERATURE ELECTRIC & HOT GAS DEFROST // 3-PHASE MOTOR

Model No. RW*E/G/H/K/L		Fan Diam. (In.)	Motor Data			Refrigerant Connections			No. of Hanger Slot Locations	Figure	Unit Dimensions (In.)			Approx. Unit Wt. (Lbs.)
			Motor Qty.	HP	RPM	Liquid Line [^]	Suction	3-Pipe Hot Gas Line			L	W	H	
6 FPI	RW6*036*TA	30	1	1	850	1/2	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6*047*TA	30	1	1	850	1/2	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6*059*TA	30	1	1	850	5/8	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6*072*TA	30	2	1	850	5/8	2-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6*096*TA	30	2	1	850	7/8	3-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6*120*TA	30	2	1	850	7/8	3-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6*143*TA	30	3	1	850	1-1/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6*179*TA	30	3	1	850	1-1/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6*216*TA	30	4	1	850	1-1/8	3-1/8	1-3/8	10	4	179-7/8	27-3/8	49-1/4	1,050
4 FPI	RW4*038*TA	30	1	1	850	1/2	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4*048*TA	30	1	1	850	5/8	2-3/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4*077*TA	30	2	1	850	5/8	2-5/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4*097*TA	30	2	1	850	7/8	3-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4*115*TA	30	3	1	850	7/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW4*145*TA	30	3	1	850	1-1/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW4*182*TA	30	4	1	850	1-1/8	3-1/8	1-3/8	10	4	179-7/8	27-3/8	49-1/4	1,050

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

[^] For units with mounted TXV components. See Nozzle/TXV table for distributor connection size when TXV is field installed.

For dimensional distance between hanger slots, consult model's corresponding dimension drawing.

Hanger slots are 1" deep x 1/2" wide. Drain is 1-1/4" NPT for all models.

SPECIFICATIONS

LOW TEMPERATURE ELECTRIC & HOT GAS DEFROST // 3-PHASE MOTOR W/ HIGH-STATIC FAN BLADES

Model No. RW*E/G/H/K/L		Fan Diam. (In.)	Motor Data			Refrigerant Connections			No. of Hanger Slot Locations	Figure	Unit Dimensions (In.)			Approx. Unit Wt. (Lbs.)
			Motor Qty.	HP	RPM	Liquid Line^	Suction	3-Pipe Hot Gas Line			L	W	H	
6 FPI	RW6*036*HA	30	1	1-1/2	1,140	1/2	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6*047*HA	30	1	1-1/2	1,140	5/8	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6*059*HA	30	1	1-1/2	1,140	5/8	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW6*072*HA	30	2	1-1/2	1,140	5/8	2-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6*096*HA	30	2	1-1/2	1,140	7/8	3-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6*120*HA	30	2	1-1/2	1,140	7/8	3-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW6*143*HA	30	3	1-1/2	1,140	1-1/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6*179*HA	30	3	1-1/2	1,140	1-1/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW6*216*HA	30	4	1-1/2	1,140	1-1/8	3-1/8	1-3/8	10	4	179-7/8	27-3/8	49-1/4	1,050
4 FPI	RW4*038*HA	30	1	1-1/2	1,140	1/2	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4*048*HA	30	1	1-1/2	1,140	5/8	2-1/8	1-1/8	4	1	59-7/8	27-3/8	49-1/4	303
	RW4*077*HA	30	2	1-1/2	1,140	5/8	2-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4*097*HA	30	2	1-1/2	1,140	7/8	3-1/8	1-1/8	6	2	99-7/8	27-3/8	49-1/4	509
	RW4*115*HA	30	3	1-1/2	1,140	7/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW4*145*HA	30	3	1-1/2	1,140	1-1/8	3-1/8	1-3/8	8	3	139-7/8	27-3/8	49-1/4	682
	RW4*182*HA	30	4	1-1/2	1,140	1-1/8	3-1/8	1-3/8	10	4	179-7/8	27-3/8	49-1/4	1,050

* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

^ For units with mounted TXV components. See Nozzle/TXV table for distributor connection size when TXV is field installed.

For dimensional distance between hanger slots, consult model's corresponding dimension drawing.


Hanger slots are 1" deep x 1/2" wide. Drain is 1-1/4" NPT for all models.

For shipping dimensions and weights, see Shipping Information tables on pages 28-31.


DIMENSIONAL DRAWINGS

Figure 1: Single Fan

Front View

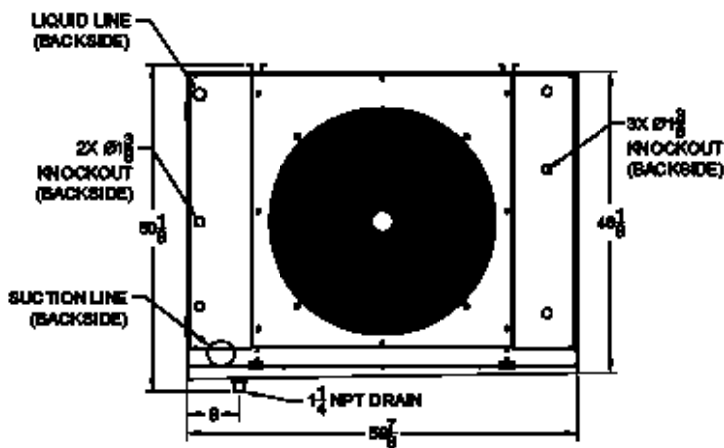

Side View

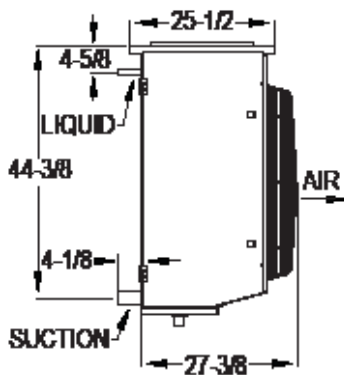

Top View

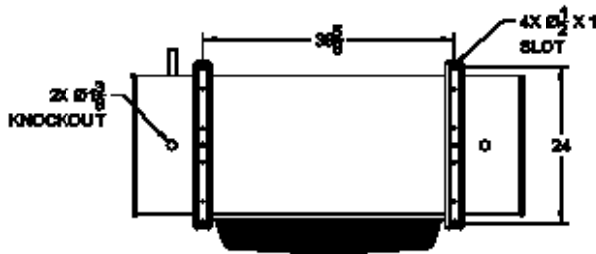


FIGURE 1: SHIPPING INFORMATION


No. of Fans	Shipping Dimensions (In.)			Shipping Weight (Lbs)
	L	W	H	
1	69	42	66	480

All mounting holes are 1/2" diameter.
Mounted hanger spacers aid in the correct installation. All dimensions are in inches.


DIMENSIONAL DRAWINGS

Figure 2: Two Fan

Front View

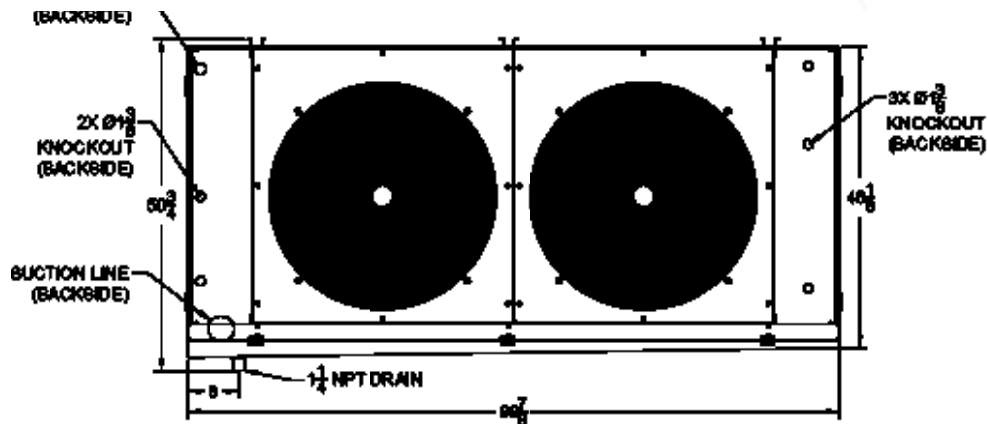

Side View

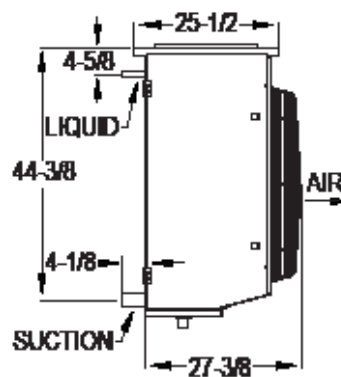

Top View

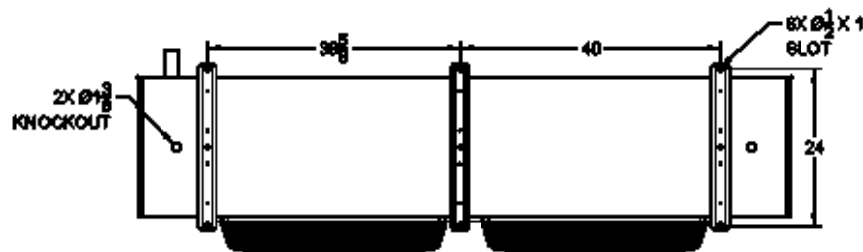


FIGURE 2: SHIPPING INFORMATION

No. of Fans	Shipping Dimensions (In.)			Shipping Weight (Lbs)
	L	W	H	
2	109	42	66	750


All mounting holes are 1/2" diameter.

Mounted hanger spacers aid in the correct installation. All dimensions are in inches.


DIMENSIONAL DRAWINGS

Figure 3: Three Fan

Front View

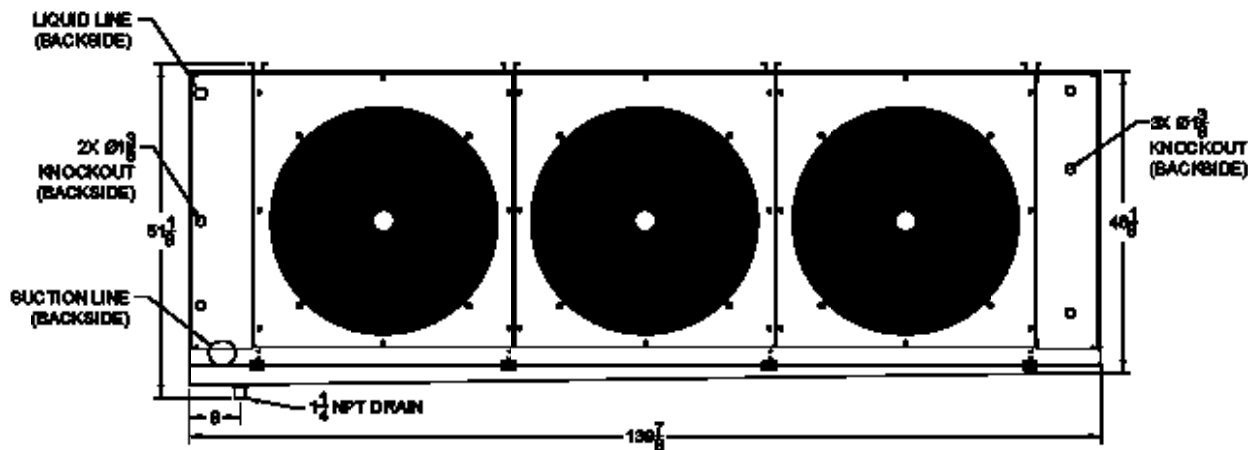

Side View

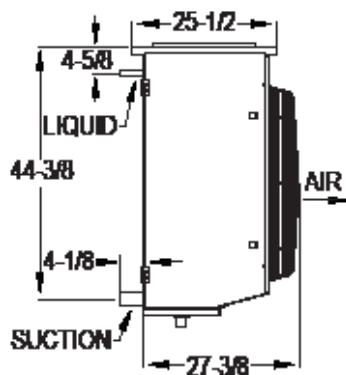

Top View

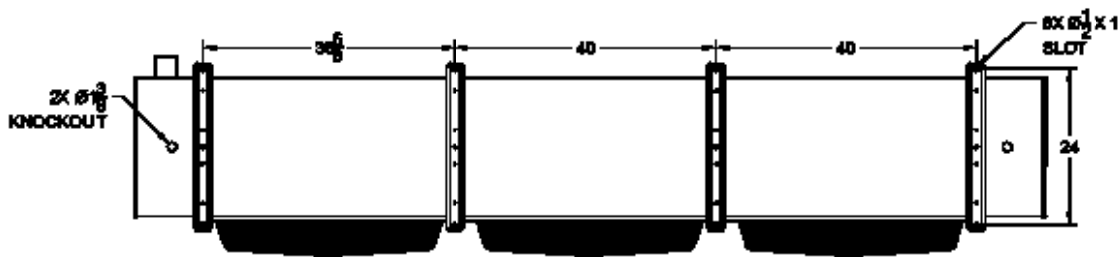


FIGURE 3: SHIPPING INFORMATION


No. of Fans	Shipping Dimensions (In.)			Shipping Weight (Lbs)
	L	W	H	
3	146	42	66	1,030

All mounting holes are 1/2" diameter.
Mounted hanger spacers aid in the correct installation. All dimensions are in inches.


DIMENSIONAL DRAWINGS

Figure 4: Four Fan

Front View

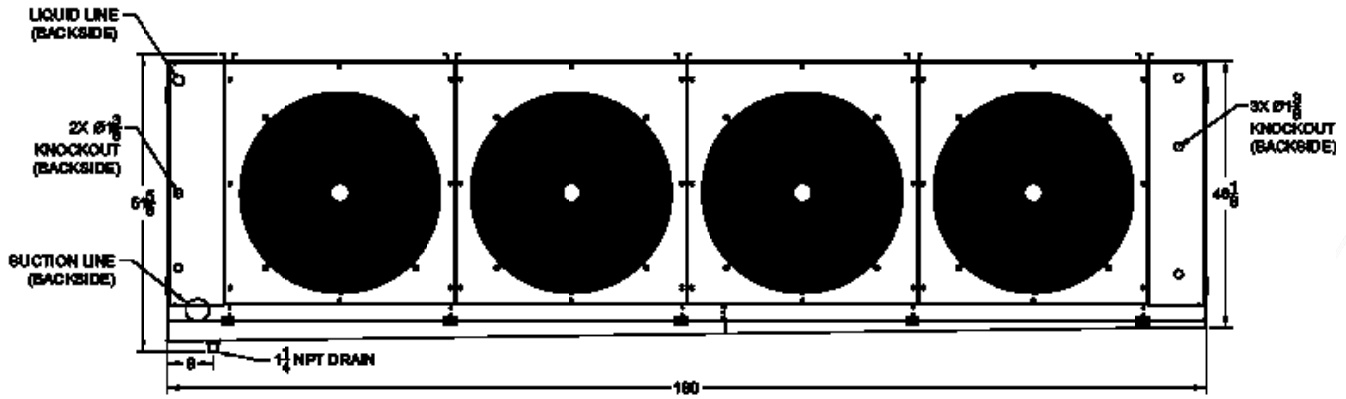

Top View



End View

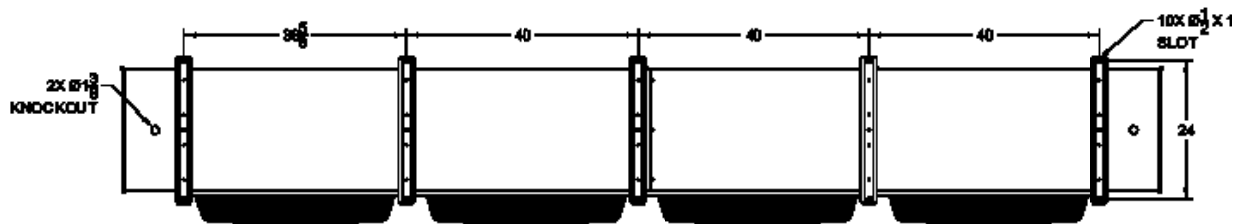


FIGURE 4: SHIPPING INFORMATION

No. of Fans	Shipping Dimensions (In.)			Shipping Weight (Lbs)
	L	W	H	
4	189	42	66	1,360

All mounting holes are 1/2" diameter.

Mounted hanger spacers aid in the correct installation. All dimensions are in inches.



Russell

ENGINEERED FOR COOL.™

©2025 Heat Transfer Products Group

Published September 2025

RU-RWX-A1-0925

russell.htpg.com

This information is the most current and accurate information available and is subject to change without notice. HTPG makes no warranty or guarantee of any kind, express or implied, regarding the information set forth herein, including without limitation warranty regarding its currency, accuracy or completeness or any warranty of merchantability or fitness for a particular purpose.

