



## NEXT GEN ALL-TEMP LOW PROFILE UNIT COOLER



### Walk-Ins: Small to Medium Cooler and Freezer Applications

Air Defrost

4,100 to 45,900 BTUH

Electric Defrost

2,700 to 33,000 BTUH

Hot Gas Defrost

2,700 to 33,000 BTUH



### FEATURES

All-Temps were the original low profile unit coolers with the air draw-through design that established the industry Standard as the all-purpose model for walk-in coolers, freezers, and other applications. We've taken these unit coolers to the next level with the release of the Next-Gen All-Temp models. The units feature a new fan guard design and deep draw venturi to achieve optimal airflow and easy access for serviceability. These models can be used with multiple refrigerants, and are available in air, electric, and hot gas defrost configurations.

### SIZES

There are a wide array of sizes available with capacities ranging from 2,700 to 45,900 BTUH at a 10°F TD. One through six fan models are available with air flow spanning a range of 800 to 4,650 CFM.

### HOUSING

The lightweight yet durable embossed aluminum casing is designed to prevent short cycling of the discharge air with baffled fan sections. These units are compliant with NSF requirements and designed to mount flush to the ceiling. The top panel features 1/2" wide slotted mounting points for easy installation. The removable drain fitting is located at the bottom of the drain pan for easy field connection and can be replaced without changing the entire drain pan. The end panels can be easily slid out from the front of the unit, providing convenient access to the spacious electrical and piping compartments from the front or side for easy maintenance.

### COIL

Copper hairpins consist of high efficiency 3/8" enhanced copper tubes which are staggered and mechanically expanded into corrugated aluminum fins achieving maximum heat transfer while reducing refrigerant charge. Die formed fin collars provide even fin spacing. Models are available in 4 and 6 fins per inch (FPI). Sweat connections are Standard on all models

### MOTORS

Standard models feature highly efficient Dual Speed Electronically Commutated (EC) motors. Available for 115V or 208/230V and are compliant with California Title 24 regulations. All motors include thermal overload protection.

### FANS

Heavy duty 12" aluminum fans are balanced to provide vibration-free operation. Improved black plastic fan guard design and deep draw venturi achieve optimal air pattern.

### ELECTRICAL

Available for 115V and 208/230V. A large electrical compartment is supplied internal to the unit to house the electrical components and is easily accessible by removing the slide out end panel. All models are UL and cUL listed and are available for 60 Hz or 50 Hz applications.

### AIR DEFROST

Air Defrost models are designed for use in coolers 35°F and warmer. All components are factory wired to convenient screw-type terminal strips.

## ELECTRIC DEFROST

Electric Defrost 6 FPI models are designed for use in coolers and freezers between 34°F to -20°F. Electric Defrost 4 FPI models are designed for use in freezers between 32°F to -20°F. Defrost heaters are mounted on the air intake side of the unit for optimal performance and easy maintenance. A lower heater is installed inside the drain pan for fast, reliable drainage. A defrost termination fan delay thermostat terminates the defrost cycle when the temperature is satisfied. The fan delay allows the warm coil to cool after a defrost cycle prior to the fans turning on. A heater safety thermostat is installed to prevent overheating.

## HOT GAS DEFROST

There are two types of Hot Gas Defrost models available: 3-pipe Hot Gas models and 2-pipe Hot Gas Reverse Cycle units (see pages 9 and 10 for more details). Hot Gas Defrost 6 FPI models are designed for use in coolers and freezers between 34°F and -20°F. Hot Gas Defrost 4 FPI models are designed for use in freezers between 32°F and -20°F. All Hot Gas units include a fixed DTFD factory wired and an electric drain pan heater.

## OPTIONAL FEATURES

- EcoNet® Enabled Controller<sup>1</sup> (factory-installed)
- EcoNet® Command Center (loose)
- Reverse Connections (Air and Electric Only - No Options)
- Thermostat - Mechanical or Electric (mounted or loose)
- Thermostatic Expansion Valve (mounted or loose)
- Electronic Expansion Valve (mounted or loose)
- Liquid Line Solenoid Valve (mounted or loose)
- Insulated Drain Pan
- Painted Cabinet (White or Black Russproof)
- Stainless Steel Cabinet
- Coated Coil (Bronz-Glow, or Electrofin®)
- Heat Exchanger (loose)

<sup>1</sup> EcoNet® Control Package includes: EEV, suction pressure transducer, suction entering air coil temp. thermistors, local on-board two-row backlit LCD display and push-button adjustments. (Controller replaces TXV, liquid line solenoid valve, room thermostat, defrost termination, fan delay, and time clock.)

## ECONET® ENABLED UNIT COOLERS (OPTIONAL)

Developed in conjunction with Rheem Manufacturing specifically for walk-in coolers and freezers — it builds on the reliability and efficiency of Rheem's EcoNet® technology.

- Saves energy in refrigeration systems through precise superheat and space temperature control, fan cycling, and controlling how often the system goes into defrost based on compressor runtime
- Eliminates unnecessary defrosts
- Maximizes energy efficiency with less compressor runtime
- Reduces fan speed to 50% during off cycle for energy savings
- Can be used with a condensing unit in single and multiple evaporator installations as a group

Optional EcoNet® Command Center with intuitive graphical interface controls up to 32 devices (including the Command Center) through one display, continuous communication between system components, and remote mount display allows for EcoNet® Enabled Unit Coolers to be programmed, monitored and troubleshot outside of space being cooled.



## MODEL NOMENCLATURE

CONFIGURABLE BASE MODEL

| K          | L                           | 6                   | E                                                                          | 121              | D                                                    | D                 | A       |
|------------|-----------------------------|---------------------|----------------------------------------------------------------------------|------------------|------------------------------------------------------|-------------------|---------|
| Brand      | Connections                 | Fins per Inch (FPI) | Defrost Type                                                               | BTUH in Hundreds | Unit Voltage <sup>1</sup>                            | Motor Type        | Vintage |
| K = Kramer | L = Standard<br>U = Reverse | 4 FPI<br>6 FPI      | A = Air<br>E = Electric<br>H = Hot Gas 3-Pipe<br>G = Hot Gas Reverse Cycle | XXX              | A = 115/1/60<br>D = 208-230/1/60<br>E = 208-230/3/60 | D = Dual Speed EC |         |

CONFIGURABLE BASE MODEL<sup>2</sup>

| A                                                                                        | L                                                                                                      |
|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Refrigerant                                                                              | Pre-assembly Code                                                                                      |
| A = R404A<br>R = EcoNet® Approved Refrigerants <sup>3</sup><br>S = R407A, R448A, R449A/B | E = EcoNet® Control Package <sup>4</sup><br>L = Mounted TXV, LLSV & Mechanical Thermostat <sup>5</sup> |

<sup>1</sup> Refrigerant and electrical connection locations have been changed for the Next-Gen All-Temp design. Standard connections "L" are now opposite of the legacy All-Temp models. Mirror connections "U" are the same end as legacy All-Temp models and are available only as built-to-order base units with no installed options. Mirror connections not available on hot gas units.

<sup>2</sup> Pre-Configuration Codes are used to show common Factory Mounted options. Pre-Configuration Codes are not available for every model. For specific model availability, see the respective Pre-Configuration pricing tables in the Kramer List Price or contact your local Kramer sales representative.

<sup>3</sup> EcoNet® approved refrigerants are: R404A, R407A, R407C, R448A, R449A/B, & R507A.

<sup>4</sup> EcoNet® Control Package includes: EEV; suction pressure transducer; suction, entering air coil temp. thermistors; local on-board two-row LCD display and push-button adjustments. (Controller replaces TXV, liquid line solenoid valve, room thermostat, defrost termination and fan delay, and time clock.)

<sup>5</sup> Models with Pre-configured Mechanical Components (TXV, LLSV and Thermostat) are rated for +25°F SST/10°F TD (Air Defrost) and -20°F SST/10°F TD (Electric Defrost).

## APPLICATION RATING &amp; ELECTRICAL DATA

## AIR DEFROST MODELS // 6 FPI

| Model No.  | BTUH Capacity<br>@ 25°F SST & 10°F TD |                                      | CFM   | No.<br>of<br>Fans | 115V                                      | 208-230V | 115V/208-230V |      |
|------------|---------------------------------------|--------------------------------------|-------|-------------------|-------------------------------------------|----------|---------------|------|
|            | R404A/<br>R744 CO <sub>2</sub> DX     | R407A/<br>R448A/R449A/B <sup>^</sup> |       |                   | Total Fan Motor AMPS<br>1 Phase EC Motors |          | MCA           | MOPD |
| KL6A041*DA | 4,100                                 | 4,800                                | 800   | 1                 | 0.8                                       | 0.5      | 15.0          | 20   |
| KL6A052*DA | 5,200                                 | 6,000                                | 785   | 1                 | 0.8                                       | 0.5      | 15.0          | 20   |
| KL6A066*DA | 6,600                                 | 7,800                                | 775   | 1                 | 0.8                                       | 0.5      | 15.0          | 20   |
| KL6A073*DA | 7,300                                 | 8,500                                | 1,600 | 2                 | 1.6                                       | 1.0      | 15.0          | 20   |
| KL6A094*DA | 9,400                                 | 10,900                               | 1,570 | 2                 | 1.6                                       | 1.0      | 15.0          | 20   |
| KL6A117*DA | 11,700                                | 13,600                               | 1,550 | 2                 | 1.6                                       | 1.0      | 15.0          | 20   |
| KL6A130*DA | 13,000                                | 15,300                               | 1,550 | 2                 | 1.6                                       | 1.0      | 15.0          | 20   |
| KL6A141*DA | 14,100                                | 16,300                               | 2,355 | 3                 | 2.4                                       | 1.5      | 15.0          | 20   |
| KL6A161*DA | 16,100                                | 18,800                               | 2,355 | 3                 | 2.4                                       | 1.5      | 15.0          | 20   |
| KL6A181*DA | 18,100                                | 21,200                               | 2,325 | 3                 | 2.4                                       | 1.5      | 15.0          | 20   |
| KL6A195*DA | 19,500                                | 22,500                               | 3,140 | 4                 | 3.2                                       | 2.0      | 15.0          | 20   |
| KL6A235*DA | 23,500                                | 27,800                               | 3,140 | 4                 | 3.2                                       | 2.0      | 15.0          | 20   |
| KL6A260*DA | 26,000                                | 30,400                               | 3,100 | 4                 | 3.2                                       | 2.0      | 15.0          | 20   |
| KL6A295*DA | 29,500                                | 36,100                               | 3,875 | 5                 | 4.0                                       | 2.5      | 15.0          | 20   |
| KL6A330*DA | 33,000                                | 38,800                               | 4,650 | 6                 | 4.8                                       | 3.0      | 15.0          | 20   |
| KL6A390*DA | 39,000                                | 45,900                               | 4,650 | 6                 | 4.8                                       | 3.0      | 15.0          | 20   |

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

<sup>^</sup> Refrigerants with large glides are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

<sup>†</sup> Dual-speed EC motors are compliant with California Title 24 regulations.

Models were designed in anticipation of the July 2020 Department of Energy AWEF regulations for evaporators for Walk-in Coolers and Freezers in boxes less than 3,000 sq. ft. See page 18 for AWEF compliance ratings.

CO<sub>2</sub> and Glycol Next-Gen All-Temp Unit Coolers available. If required, please contact factory.

## APPLICATION RATING &amp; ELECTRICAL DATA

## ELECTRIC DEFROST MODELS // 6 FPI

| Model No.  | BTUH Capacity<br>@ -20°F SST & 10°F TD <sup>1</sup> |                          | CFM   | No.<br>of<br>Fans | 230V                                                         | 208-230V/1                 |                                 |                            |                                 |
|------------|-----------------------------------------------------|--------------------------|-------|-------------------|--------------------------------------------------------------|----------------------------|---------------------------------|----------------------------|---------------------------------|
|            | R404A/<br>CO2DX                                     | R407A/<br>R448A/R449A/B^ |       |                   | Total Fan<br>Motor AMPS<br>1 Phase<br>EC Motors <sup>†</sup> | MCA                        |                                 | MOPD                       |                                 |
|            |                                                     |                          |       |                   |                                                              | Base<br>Model <sup>2</sup> | EcoNet®<br>Enabled <sup>3</sup> | Base<br>Model <sup>2</sup> | EcoNet®<br>Enabled <sup>3</sup> |
| KL6E035DDA | 3,500                                               | 4,000                    | 800   | 1                 | 0.5                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E042DDA | 4,200                                               | 4,900                    | 785   | 1                 | 0.5                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E049DDA | 4,900                                               | 5,600                    | 775   | 1                 | 0.5                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E066DDA | 6,600                                               | 7,600                    | 1,600 | 2                 | 1.0                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E077DDA | 7,700                                               | 8,800                    | 1,570 | 2                 | 1.0                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E090DDA | 9,000                                               | 10,600                   | 1,550 | 2                 | 1.0                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E105DDA | 10,500                                              | 12,400                   | 1,550 | 2                 | 1.0                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E121DDA | 12,100                                              | 14,200                   | 2,355 | 3                 | 1.5                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E142DDA | 14,200                                              | 16,600                   | 2,325 | 3                 | 1.5                                                          | 15.0                       | 15.0                            | 20                         | 20                              |
| KL6E162DDA | 16,200                                              | 18,700                   | 3,140 | 4                 | 2.0                                                          | 15.0                       | 19.2                            | 20                         | 20                              |
| KL6E182DDA | 18,200                                              | 21,000                   | 3,100 | 4                 | 2.0                                                          | 15.0                       | 19.2                            | 20                         | 20                              |
| KL6E200*DA | 20,000                                              | 22,800                   | 3,925 | 5                 | 2.5                                                          | 15.0                       | 24.1                            | 20                         | 30                              |
| KL6E244*DA | 24,400                                              | 27,900                   | 4,710 | 6                 | 3.0                                                          | 15.0                       | 29.0                            | 20                         | 30                              |
| KL6E281*DA | 28,100                                              | 33,000                   | 4,650 | 6                 | 3.0                                                          | 15.0                       | 29.0                            | 20                         | 30                              |

| Model No.  | 208-230V/3              |                         | 230V        |      | Heater Watts |
|------------|-------------------------|-------------------------|-------------|------|--------------|
|            | MCA                     | MOPD                    | Heater Amps |      |              |
|            | Base Model <sup>2</sup> | Base Model <sup>2</sup> | 1 PH        | 3 PH |              |
| KL6E035DDA | -                       | -                       | 4.9         | -    | 1,125        |
| KL6E042DDA | -                       | -                       | 4.9         | -    | 1,125        |
| KL6E049DDA | -                       | -                       | 4.9         | -    | 1,125        |
| KL6E066DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL6E077DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL6E090DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL6E105DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL6E121DDA | -                       | -                       | 14.3        | -    | 3,300        |
| KL6E142DDA | -                       | -                       | 14.3        | -    | 3,300        |
| KL6E162DDA | -                       | -                       | 19.2        | -    | 4,425        |
| KL6E182DDA | -                       | -                       | 19.2        | -    | 4,425        |
| KL6E200*DA | 15.0                    | 20                      | 24.1        | 14.0 | 5,550        |
| KL6E244*DA | 15.0                    | 20                      | 29.0        | 16.8 | 6,675        |
| KL6E281*DA | 15.0                    | 20                      | 29.0        | 16.8 | 6,675        |

See notes on page 7.

## APPLICATION RATING &amp; ELECTRICAL DATA

## ELECTRIC DEFROST MODELS // 4 FPI

| Model No.  | BTUH Capacity<br>@ -20°F SST & 10°F TD¹ |                          | CFM   | No.<br>of<br>Fans | 230V                                             | 208-230V/1     |                     |                |                     |
|------------|-----------------------------------------|--------------------------|-------|-------------------|--------------------------------------------------|----------------|---------------------|----------------|---------------------|
|            | R404A/<br>CO₂DX                         | R407A/<br>R448A/R449A/B^ |       |                   |                                                  | MCA            |                     | MOPD           |                     |
|            |                                         |                          |       |                   | Total Fan<br>Motor AMPS<br>1 Phase<br>EC Motors† | Base<br>Model² | EcoNet®<br>Enabled³ | Base<br>Model² | EcoNet®<br>Enabled³ |
| KL4E027DDA | 2,700                                   | 3,100                    | 800   | 1                 | 0.5                                              | cv             | 15.0                | 20             | 20                  |
| KL4E032DDA | 3,200                                   | 3,800                    | 785   | 1                 | 0.5                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E038DDA | 3,800                                   | 4,400                    | 775   | 1                 | 0.5                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E051DDA | 5,100                                   | 5,900                    | 1,600 | 2                 | 1.0                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E064DDA | 6,400                                   | 7,300                    | 1,570 | 2                 | 1.0                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E080DDA | 8,000                                   | 9,500                    | 1,550 | 2                 | 1.0                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E094DDA | 9,400                                   | 11,000                   | 2,355 | 3                 | 1.5                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E110DDA | 11,000                                  | 12,800                   | 2,325 | 3                 | 1.5                                              | 15.0           | 15.0                | 20             | 20                  |
| KL4E125DDA | 12,500                                  | 14,400                   | 3,140 | 4                 | 2.0                                              | 15.0           | 19.2                | 20             | 20                  |
| KL4E141DDA | 14,100                                  | 16,300                   | 3,100 | 4                 | 2.0                                              | 15.0           | 19.2                | 20             | 20                  |
| KL4E155*DA | 15,500                                  | 17,700                   | 3,925 | 5                 | 2.5                                              | 15.0           | 24.1                | 20             | 30                  |
| KL4E195*DA | 19,500                                  | 22,300                   | 4,710 | 6                 | 3.0                                              | 15.0           | 29.0                | 20             | 30                  |
| KL4E230*DA | 23,000                                  | 27,000                   | 4,650 | 6                 | 3.0                                              | 15.0           | 29.0                | 20             | 30                  |

| Model No.  | 208-230V/3              |                         | 230V        |      | Heater Watts |
|------------|-------------------------|-------------------------|-------------|------|--------------|
|            | MCA                     | MOPD                    | Heater Amps |      |              |
|            | Base Model <sup>2</sup> | Base Model <sup>2</sup> | 1 PH        | 3 PH |              |
| KL4E027DDA | -                       | -                       | 4.9         | -    | 1,125        |
| KL4E032DDA | -                       | -                       | 4.9         | -    | 1,125        |
| KL4E038DDA | -                       | -                       | 4.9         | -    | 1,125        |
| KL4E051DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL4E064DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL4E080DDA | -                       | -                       | 9.8         | -    | 2,250        |
| KL4E094DDA | -                       | -                       | 14.3        | -    | 3,300        |
| KL4E110DDA | -                       | -                       | 14.3        | -    | 3,300        |
| KL4E125DDA | -                       | -                       | 19.2        | -    | 4,425        |
| KL4E141DDA | -                       | -                       | 19.2        | -    | 4,425        |
| KL4E155*DA | 15.0                    | 20                      | 24.1        | 14.0 | 5,550        |
| KL4E195*DA | 15.0                    | 20                      | 29.0        | 16.8 | 6,675        |
| KL4E230*DA | 15.0                    | 20                      | 29.0        | 16.8 | 6,675        |

<sup>1</sup> Capacity values adjusted using the Correction Table for Electric Defrost Evaporators and Hot Gas Defrost Evaporators

<sup>2</sup> Base Model MCA/MOPD Represents Motor Circuit since Defrost Heaters are powered via the Condensing Unit.

<sup>3</sup> EcoNet<sup>®</sup> Enabled Units are not powered by Condensing Unit so Defrost Heaters are incorporated into shown MCA/MOPD. EcoNet<sup>®</sup> is not available on 208-230/3/60.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

<sup>^</sup> Refrigerants with large glides are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

<sup>†</sup> Dual Speed EC motors are compliant with California Title 24 regulations. Models were designed in anticipation of the July 2020 Department of Energy AWEF regulations for evaporators for Walk-in Coolers and Freezers in boxes less than 3,000 sq. ft.

## Capacity Correction for Electric Defrost Evaporators and Hot Gas Defrost Evaporators

| SST (Dew)             | 20°F | 0°F   | -10°F  | -20°F | -30°F  |
|-----------------------|------|-------|--------|-------|--------|
| Multiply Capacity by: | 1.15 | 1.075 | 1.0375 | 1     | 0.9625 |

## APPLICATION RATING &amp; ELECTRICAL DATA


## HOT GAS DEFROST MODELS // 6 FPI

| Hot Gas 3-Pipe Model No. | Hot Gas Reverse Cycle 2-Pipe Model No. | BTUH Capacity @ -20°F SST & 10°F TD <sup>1</sup> |                                  | CFM   | No. of Fans | 115V                                                | 208-230V | 115V/208-230V    |                   |
|--------------------------|----------------------------------------|--------------------------------------------------|----------------------------------|-------|-------------|-----------------------------------------------------|----------|------------------|-------------------|
|                          |                                        | R404A                                            | R407A/R448A/R449A/B <sup>^</sup> |       |             | Total Fan Motor AMPS 1 Phase EC Motors <sup>†</sup> |          | MCA <sup>2</sup> | MOPD <sup>2</sup> |
| KL6H035*DA               | KL6G035*DA                             | 3,500                                            | 4,000                            | 800   | 1           | 0.8                                                 | 0.5      | 15.0             | 20                |
| KL6H042*DA               | KL6G042*DA                             | 4,200                                            | 4,900                            | 785   | 1           | 0.8                                                 | 0.5      | 15.0             | 20                |
| KL6H049*DA               | KL6G049*DA                             | 4,900                                            | 5,600                            | 775   | 1           | 0.8                                                 | 0.5      | 15.0             | 20                |
| KL6H066*DA               | KL6G066*DA                             | 6,600                                            | 7,600                            | 1,600 | 2           | 1.6                                                 | 1.0      | 15.0             | 20                |
| KL6H077*DA               | KL6G077*DA                             | 7,700                                            | 8,800                            | 1,570 | 2           | 1.6                                                 | 1.0      | 15.0             | 20                |
| KL6H090*DA               | KL6G090*DA                             | 9,000                                            | 10,600                           | 1,550 | 2           | 1.6                                                 | 1.0      | 15.0             | 20                |
| KL6H105*DA               | KL6G105*DA                             | 10,500                                           | 12,400                           | 1,550 | 2           | 1.6                                                 | 1.0      | 15.0             | 20                |
| KL6H121*DA               | KL6G121*DA                             | 12,100                                           | 14,200                           | 2,355 | 3           | 2.4                                                 | 1.5      | 15.0             | 20                |
| KL6H142*DA               | KL6G142*DA                             | 14,200                                           | 16,600                           | 2,325 | 3           | 2.4                                                 | 1.5      | 15.0             | 20                |
| KL6H162*DA               | KL6G162*DA                             | 16,200                                           | 16,700                           | 3,140 | 4           | 3.2                                                 | 2.0      | 15.0             | 20                |
| KL6H182*DA               | KL6G182*DA                             | 18,200                                           | 21,000                           | 3,100 | 4           | 3.2                                                 | 2.0      | 15.0             | 20                |
| KL6H200*DA               | KL6G200*DA                             | 20,000                                           | 22,800                           | 3,925 | 5           | 4.0                                                 | 2.5      | 15.0             | 20                |
| KL6H244*DA               | KL6G244*DA                             | 24,400                                           | 27,900                           | 4,710 | 6           | 4.8                                                 | 3.0      | 15.0             | 20                |
| KL6H281*DA               | KL6G281*DA                             | 28,100                                           | 33,000                           | 4,650 | 6           | 4.8                                                 | 3.0      | 15.0             | 20                |

| Hot Gas 3-Pipe<br>Model No. | Hot Gas<br>Reverse Cycle<br>2-Pipe<br>Model No. | 115V                     | 230V | Drain<br>Pan<br>Heater<br>Watts |
|-----------------------------|-------------------------------------------------|--------------------------|------|---------------------------------|
|                             |                                                 | Drain Pan Heater<br>Amps |      |                                 |
|                             |                                                 | 1 PH                     | 1 PH |                                 |
| KL6H035*DA                  | KL6G035*DA                                      | 3.1                      | 1.7  | 375                             |
| KL6H042*DA                  | KL6G042*DA                                      | 3.1                      | 1.7  | 375                             |
| KL6H049*DA                  | KL6G049*DA                                      | 3.1                      | 1.7  | 375                             |
| KL6H066*DA                  | KL6G066*DA                                      | 6.3                      | 3.3  | 750                             |
| KL6H077*DA                  | KL6G077*DA                                      | 6.3                      | 3.3  | 750                             |
| KL6H090*DA                  | KL6G090*DA                                      | 6.3                      | 3.3  | 750                             |
| KL6H105*DA                  | KL6G105*DA                                      | 6.3                      | 3.3  | 750                             |
| KL6H121*DA                  | KL6G121*DA                                      | 9.3                      | 4.8  | 1,100                           |
| KL6H142*DA                  | KL6G142*DA                                      | 9.3                      | 4.8  | 1,100                           |
| KL6H162*DA                  | KL6G162*DA                                      | 12.3                     | 6.4  | 1,475                           |
| KL6H182*DA                  | KL6G182*DA                                      | 12.3                     | 6.4  | 1,475                           |
| KL6H200*DA                  | KL6G200*DA                                      | 15.4                     | 8.1  | 1,850                           |
| KL6H244*DA                  | KL6G244*DA                                      | 18.5                     | 9.7  | 2,225                           |
| KL6H281*DA                  | KL6G281*DA                                      | 18.5                     | 9.7  | 2,225                           |

## HOT GAS 3-PIPE MODEL

The system uses 3 pipes — 1 for liquid line, 1 for suction line and 1 for hot gas. The hot gas is taken from the discharge line, between the compressor and the condenser, through a hot-gas solenoid valve to the distributor tee then through the coil.

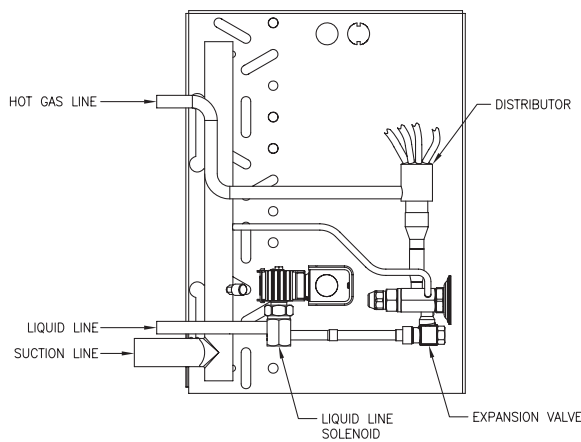

<sup>2</sup> Base Model MCA/MOPD Represents Motor Circuit since Defrost Heaters are powered via the Condensing Unit.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

<sup>^</sup> Refrigerants with large glides are rated at dew point temperature. Use R407A capacity ratings for R407C and R407F.

<sup>†</sup> Dual Speed EC motors are compliant with California Title 24 regulations.

Models were designed in anticipation of the July 2020 Department of Energy AWEF regulations for evaporators for Walk-in Coolers and Freezers in boxes less than 3,000 sq. ft. See page 19 for AWEF compliance ratings.

# APPLICATION RATING & ELECTRICAL DATA

## HOT GAS DEFROST MODELS // 4 FPI


| Hot Gas<br>3-Pipe<br>Model No. | Hot Gas<br>Reverse<br>Cycle 2-Pipe<br>Model No. | BTUH Capacity<br>@ -20°F SST & 10°F TD¹ |                          | CFM   | No.<br>of<br>Fans | 115V                                       | 208-230V | 115V/208-230V |       |
|--------------------------------|-------------------------------------------------|-----------------------------------------|--------------------------|-------|-------------------|--------------------------------------------|----------|---------------|-------|
|                                |                                                 | R404A                                   | R407A/R448A/<br>R449A/B^ |       |                   | Total Fan Motor AMPS 1<br>Phase EC Motors¹ |          | MCA²          | MOPD² |
| KL4H027*DA                     | KL4G027*DA                                      | 2,700                                   | 3,100                    | 800   | 1                 | 0.8                                        | 0.5      | 15.0          | 20    |
| KL4H032*DA                     | KL4G032*DA                                      | 3,200                                   | 3,800                    | 785   | 1                 | 0.8                                        | 0.5      | 15.0          | 20    |
| KL4H038*DA                     | KL4G038*DA                                      | 3,800                                   | 4,400                    | 775   | 1                 | 0.8                                        | 0.5      | 15.0          | 20    |
| KL4H051*DA                     | KL4G051*DA                                      | 5,100                                   | 5,900                    | 1,600 | 2                 | 1.6                                        | 1.0      | 15.0          | 20    |
| KL4H064*DA                     | KL4G064*DA                                      | 6,400                                   | 7,300                    | 1,570 | 2                 | 1.6                                        | 1.0      | 15.0          | 20    |
| KL4H080*DA                     | KL4G080*DA                                      | 8,000                                   | 9,500                    | 1,550 | 2                 | 1.6                                        | 1.0      | 15.0          | 20    |
| KL4H094*DA                     | KL4G094*DA                                      | 9,400                                   | 11,000                   | 2,355 | 3                 | 2.4                                        | 1.5      | 15.0          | 20    |
| KL4H110*DA                     | KL4G110*DA                                      | 11,000                                  | 12,800                   | 2,325 | 3                 | 2.4                                        | 1.5      | 15.0          | 20    |
| KL4H125*DA                     | KL4G125*DA                                      | 12,500                                  | 14,400                   | 3,140 | 4                 | 3.2                                        | 2.0      | 15.0          | 20    |
| KL4H141*DA                     | KL4G141*DA                                      | 14,100                                  | 16,300                   | 3,100 | 4                 | 3.2                                        | 2.0      | 15.0          | 20    |
| KL4H155*DA                     | KL4G155*DA                                      | 15,500                                  | 17,700                   | 3,925 | 5                 | 4.0                                        | 2.5      | 15.0          | 20    |
| KL4H195*DA                     | KL4G195*DA                                      | 19,500                                  | 22,300                   | 4,710 | 6                 | 4.8                                        | 3.0      | 15.0          | 20    |
| KL4H230*DA                     | KL4G230*DA                                      | 23,000                                  | 27,000                   | 4,650 | 6                 | 4.8                                        | 3.0      | 15.0          | 20    |

| Hot Gas 3-Pipe<br>Model No. | Hot Gas<br>Reverse Cycle<br>2-Pipe<br>Model No. | 115V                     | 230V | Drain<br>Pan<br>Heater<br>Watts |
|-----------------------------|-------------------------------------------------|--------------------------|------|---------------------------------|
|                             |                                                 | Drain Pan Heater<br>Amps |      |                                 |
|                             |                                                 | 1 PH                     | 1 PH |                                 |
| KL4H027*DA                  | KL4G027*DA                                      | 3.1                      | 1.7  | 373                             |
| KL4H032*DA                  | KL4G032*DA                                      | 3.1                      | 1.7  | 373                             |
| KL4H038*DA                  | KL4G038*DA                                      | 3.1                      | 1.7  | 373                             |
| KL4H051*DA                  | KL4G051*DA                                      | 6.3                      | 3.3  | 750                             |
| KL4H064*DA                  | KL4G064*DA                                      | 6.3                      | 3.3  | 750                             |
| KL4H080*DA                  | KL4G080*DA                                      | 6.3                      | 3.3  | 750                             |
| KL4H094*DA                  | KL4G094*DA                                      | 9.3                      | 4.8  | 1,100                           |
| KL4H110*DA                  | KL4G110*DA                                      | 9.3                      | 4.8  | 1,100                           |
| KL4H125*DA                  | KL4G125*DA                                      | 12.3                     | 6.4  | 1,475                           |
| KL4H141*DA                  | KL4G141*DA                                      | 12.3                     | 6.4  | 1,475                           |
| KL4H155*DA                  | KL4G155*DA                                      | 15.4                     | 8.1  | 1,850                           |
| KL4H195*DA                  | KL4G195*DA                                      | 18.5                     | 9.7  | 2,225                           |
| KL4H230*DA                  | KL4G230*DA                                      | 18.5                     | 9.7  | 2,225                           |

See notes on page 8.

### HOT GAS REVERSE CYCLE 2-PIPE MODEL

A changeover valve is located in the discharge suction line of the compressor, so that when defrost is required, the valve changes over from the normal refrigeration flow so that the discharged gas flows into the suction connection and bypasses TX valve.

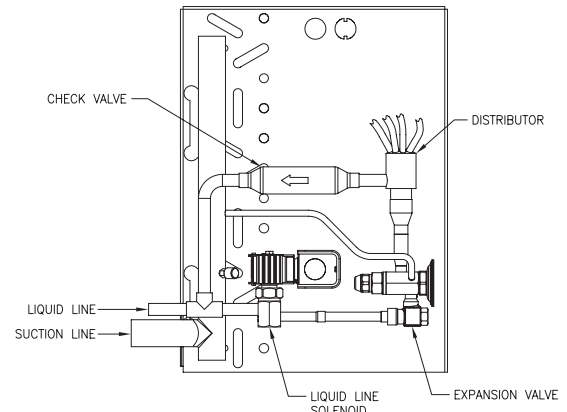

### Capacity Correction for Electric Defrost Evaporators and Hot Gas Defrost Evaporators

| SST (Dew)             | 20°F | 0°F   | -10°F  | -20°F | -30°F  |
|-----------------------|------|-------|--------|-------|--------|
| Multiply Capacity by: | 1.15 | 1.075 | 1.0375 | 1     | 0.9625 |

## DISTRIBUTOR NOZZLES &amp; EXPANSION VALVES

AIR DEFROST MODELS // 6 FPI

| Model No.            |            | Nozzle @ Liq. Temp. |           | TXV <sup>^</sup> @ Liq. Temp. |            | EEV @ Liq. Temp |        | No. of Circuits |
|----------------------|------------|---------------------|-----------|-------------------------------|------------|-----------------|--------|-----------------|
|                      |            | 50°F                | 100°F     | 50°F                          | 100°F      | 50°F            | 100°F  |                 |
| R404A                | KL6A041*DA | –                   | –         | SBFSE-AAA-C                   | SBFSE-AA-C | SER-AA          | SER-AA | 1               |
|                      | KL6A052*DA | –                   | –         | SBFSE-AA-C                    | SBFSE-AA-C | SER-AA          | SER-A  | 1               |
|                      | KL6A066*DA | L, #1/4             | L, #3/4   | SBFSE-AA-C                    | SBFSE-A-C  | SER-A           | SER-A  | 2               |
|                      | KL6A073*DA | L, #1/4             | L, #3/4   | SBFSE-AA-C                    | SBFSE-A-C  | SER-A           | SER-A  | 2               |
|                      | KL6A094*DA | L, #1/4             | L, #1     | SBFSE-A-C                     | SBFSE-A-C  | SER-A           | SER-B  | 2               |
|                      | KL6A117*DA | L, #1/3             | L, #1-1/2 | SBFSE-A-C                     | SBFSE-A-C  | SER-A           | SER-B  | 3               |
|                      | KL6A130*DA | L, #1/2             | L, #1-1/2 | SBFSE-A-C                     | SBFSE-B-C  | SER-B           | SER-B  | 3               |
|                      | KL6A141*DA | L, #1/2             | L, #1-1/2 | SBFSE-A-C                     | SBFSE-B-C  | SER-B           | SER-B  | 4               |
|                      | KL6A161*DA | L, #1/2             | L, #1-1/2 | SBFSE-A-C                     | SBFSE-B-C  | SER-B           | SER-C  | 3               |
|                      | KL6A181*DA | L, #1/2             | L, #2     | SBFSE-B-C                     | SBFSE-B-C  | SER-B           | SER-C  | 4               |
|                      | KL6A195*DA | L, #3/4             | L, #2     | SBFSE-B-C                     | SBFSE-B-C  | SER-B           | SER-C  | 4               |
|                      | KL6A235*DA | L, #3/4             | L, #2-1/2 | SBFSE-B-C                     | SBFSE-C-C  | SER-C           | SER-C  | 6               |
|                      | KL6A260*DA | L, #3/4             | L, #2-1/2 | SBFSE-B-C                     | SBFSE-C-C  | SER-C           | SER-C  | 6               |
|                      | KL6A295*DA | L, #1               | L, #3     | SBFSE-B-C                     | SBFSE-C-C  | SER-C           | SER-C  | 8               |
|                      | KL6A330*DA | L, #1               | L, #4     | SBFSE-C-C                     | EBSS-6-C   | SER-C           | SER-C  | 7               |
|                      | KL6A390*DA | L, #1-1/2           | L, #4     | SBFSE-C-C                     | EBSS-6-C   | SER-C           | SER-C  | 8               |
| R407A/R448A/R449A/B† | KL6A041*DA | –                   | –         | SBFDE-AA-C                    | SBFDE-AA-C | SER-AA          | SER-AA | 1               |
|                      | KL6A052*DA | –                   | –         | SBFDE-AA-C                    | SBFDE-AA-C | SER-AA          | SER-AA | 1               |
|                      | KL6A066*DA | L, #1/4             | L, #3/4   | SBFDE-AA-C                    | SBFDE-AA-C | SER-A           | SER-A  | 2               |
|                      | KL6A073*DA | L, #1/4             | L, #3/4   | SBFDE-AA-C                    | SBFDE-AA-C | SER-A           | SER-A  | 2               |
|                      | KL6A094*DA | L, #1/3             | L, #1     | SBFDE-AA-C                    | SBFDE-A-C  | SER-A           | SER-A  | 2               |
|                      | KL6A117*DA | L, #1/2             | L, #1-1/2 | SBFDE-A-C                     | SBFDE-A-C  | SER-A           | SER-B  | 3               |
|                      | KL6A130*DA | L, #1/2             | L, #1-1/2 | SBFDE-A-C                     | SBFDE-A-C  | SER-B           | SER-B  | 3               |
|                      | KL6A141*DA | L, #1/2             | L, #1-1/2 | SBFDE-A-C                     | SBFDE-A-C  | SER-B           | SER-B  | 4               |
|                      | KL6A161*DA | L, #3/4             | L, #1-1/2 | SBFDE-A-C                     | SBFDE-B-C  | SER-B           | SER-B  | 3               |
|                      | KL6A181*DA | L, #3/4             | L, #2     | SBFDE-A-C                     | SBFDE-B-C  | SER-B           | SER-B  | 4               |
|                      | KL6A195*DA | L, #3/4             | L, #2     | SBFDE-A-C                     | SBFDE-B-C  | SER-B           | SER-B  | 4               |
|                      | KL6A235*DA | L, #1               | L, #2-1/2 | SBFDE-B-C                     | SBFDE-B-C  | SER-B           | SER-C  | 6               |
|                      | KL6A260*DA | L, #1               | L, #2-1/2 | SBFDE-B-C                     | SBFDE-C-C  | SER-C           | SER-C  | 6               |
|                      | KL6A295*DA | L, #1-1/2           | L, #3     | SBFDE-B-C                     | SBFDE-C-C  | SER-C           | SER-C  | 8               |
|                      | KL6A330*DA | L, #1-1/2           | L, #3     | SBFDE-B-C                     | SBFDE-C-C  | SER-C           | SER-C  | 7               |
|                      | KL6A390*DA | L, #1-1/2           | L, #4     | SBFDE-C-C                     | SBFDE-C-C  | SER-C           | SER-C  | 8               |

Distributor lines are 3/16" diameter and 14" long.

Distributor connection size is 1/2" for all air defrost models.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

– Single feed circuit coils do not get a distributor/nozzle. Line breaks in the table above are per number of fans.

<sup>^</sup> TXV selections are based on +25°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of<sup>†</sup> SBFDE expansion valves are compatible with R407A, R448A and R449A/B. For other valves, follow manufacturers selection guidelines.

Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

# DISTRIBUTOR NOZZLES & EXPANSION VALVES

## ELECTRIC DEFROST MODELS // 6 FPI

| Model No.                        |            | Nozzle @ Liq. Temp. |           | TXV <sup>^</sup> @ Liq. Temp. |             | EEV @ Liq. Temp |        | No. of Circuits |
|----------------------------------|------------|---------------------|-----------|-------------------------------|-------------|-----------------|--------|-----------------|
|                                  |            | 50°F                | 100°F     | 50°F                          | 100°F       | 50°F            | 100°F  |                 |
| R404A                            | KL6E035DDA | –                   | –         | SBFSE-AAA-ZP                  | SBFSE-AA-ZP | SER-AA          | SER-AA | 1               |
|                                  | KL6E042DDA | L, #1/3             | L, #3/4   | SBFSE-AA-ZP                   | SBFSE-AA-ZP | SER-AA          | SER-AA | 2               |
|                                  | KL6E049DDA | L, #1/2             | L, #1     | SBFSE-AA-ZP                   | SBFSE-A-ZP  | SER-AA          | SER-A  | 2               |
|                                  | KL6E066DDA | L, #1/2             | L, #1     | SBFSE-AA-ZP                   | SBFSE-A-ZP  | SER-A           | SER-A  | 2               |
|                                  | KL6E077DDA | L, #3/4             | L, #1-1/2 | SBFSE-A-ZP                    | SBFSE-A-ZP  | SER-A           | SER-A  | 3               |
|                                  | KL6E090DDA | L, #3/4             | L, #1-1/2 | SBFSE-A-ZP                    | SBFSE-A-ZP  | SER-A           | SER-A  | 5               |
|                                  | KL6E105DDA | L, #1               | L, #2     | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL6E121DDA | L, #1               | L, #2     | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E142DDA | L, #1-1/2           | L, #2-1/2 | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E162DDA | L, #1-1/2           | L, #2-1/2 | SBFSE-B-ZP                    | SBFSE-C-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E182DDA | L, #1-1/2           | L, #3     | SBFSE-B-ZP                    | SBFSE-C-ZP  | SER-B           | SER-C  | 6               |
|                                  | KL6E200*DA | L, #1-1/2           | L, #3     | SBFSE-B-ZP                    | SBFSE-C-ZP  | SER-B           | SER-C  | 6               |
|                                  | KL6E244*DA | L, #2               | L, #4     | SBFSE-C-ZP                    | EBSSSE-6-ZP | SER-C           | SER-C  | 9               |
|                                  | KL6E281*DA | G, #2-1/2           | G, #5     | SBFSE-C-ZP                    | EBSSSE-6-ZP | SER-C           | SER-C  | 12              |
| R407A/R448A/R449A/B <sup>†</sup> | KL6E035DDA | –                   | –         | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 1               |
|                                  | KL6E042DDA | L, #1/3             | L, #3/4   | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 2               |
|                                  | KL6E049DDA | L, #1/3             | L, #3/4   | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 2               |
|                                  | KL6E066DDA | L, #1/2             | L, #1     | SBFDE-AA-ZP                   | SBFDE-A-ZP  | SER-A           | SER-A  | 2               |
|                                  | KL6E077DDA | L, #3/4             | L, #1     | SBFDE-A-ZP                    | SBFDE-A-ZP  | SER-A           | SER-A  | 3               |
|                                  | KL6E090DDA | L, #3/4             | L, #1-1/2 | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-A  | 5               |
|                                  | KL6E105DDA | L, #1               | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL6E121DDA | L, #1               | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL6E142DDA | L, #1-1/2           | L, #2     | SBFDE-B-ZP                    | SBFDE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E162DDA | L, #1-1/2           | L, #2-1/2 | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E182DDA | L, #1-1/2           | L, #2-1/2 | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E200*DA | L, #1-1/2           | L, #3     | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL6E244*DA | L, #2               | L, #4     | SBFDE-C-ZP                    | SBFDE-C-ZP  | SER-B           | SER-C  | 9               |
|                                  | KL6E281*DA | G, #2-1/2           | G, #4     | SBFDE-C-ZP                    | SBFDE-C-ZP  | SER-C           | SER-C  | 12              |

Distributor lines are 3/16" diameter and 14" long.

Distributor connection size is 1/2" for electric defrost models with "L" nozzle and 7/8" for models with "G" nozzle.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

– Single feed circuit coils do not get a distributor/nozzle.

<sup>^</sup> TXV selections are based on -20°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

Do not use pressure limiting TXVs when the condensing unit includes a CPR valve.

## DISTRIBUTOR NOZZLES &amp; EXPANSION VALVES

## ELECTRIC DEFROST MODELS // 4 FPI

| Model No.                        |            | Nozzle @ Liq. Temp. |           | TXV <sup>^</sup> @ Liq. Temp. |             | EEV @ Liq. Temp |        | No. of Circuits |
|----------------------------------|------------|---------------------|-----------|-------------------------------|-------------|-----------------|--------|-----------------|
|                                  |            | 50°F                | 100°F     | 50°F                          | 100°F       | 50°F            | 100°F  |                 |
| R404A                            | KL4E027DDA | –                   | –         | SBFSE-AAA-ZP                  | SBFSE-AA-ZP | SER-AA          | SER-AA | 1               |
|                                  | KL4E032DDA | –                   | –         | SBFSE-AA-ZP                   | SBFSE-AA-ZP | SER-AA          | SER-AA | 1               |
|                                  | KL4E038DDA | L, #1/3             | L, #3/4   | SBFSE-AA-ZP                   | SBFSE-AA-ZP | SER-AA          | SER-AA | 2               |
|                                  | KL4E051DDA | L, #1/2             | L, #1     | SBFSE-AA-ZP                   | SBFSE-A-ZP  | SER-AA          | SER-A  | 2               |
|                                  | KL4E064DDA | L, #1/2             | L, #1-1/2 | SBFSE-AA-ZP                   | SBFSE-A-ZP  | SER-A           | SER-A  | 3               |
|                                  | KL4E080DDA | L, #3/4             | L, #1-1/2 | SBFSE-A-ZP                    | SBFSE-A-ZP  | SER-A           | SER-A  | 6               |
|                                  | KL4E094DDA | L, #3/4             | L, #2     | SBFSE-A-ZP                    | SBFSE-A-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL4E110DDA | L, #1               | L, #2     | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL4E125DDA | L, #1               | L, #2-1/2 | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL4E141DDA | L, #1               | L, #2-1/2 | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL4E155*DA | L, #1-1/2           | L, #2-1/2 | SBFSE-A-ZP                    | SBFSE-C-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL4E195*DA | L, #2               | L, #4     | SBFSE-B-ZP                    | SBFSE-C-ZP  | SER-B           | SER-C  | 9               |
|                                  | KL4E230*DA | G, #2               | G, #4     | SBFSE-C-ZP                    | SBFSE-C-ZP  | SER-B           | SER-C  | 12              |
| R407A/R448A/R449A/B <sup>†</sup> | KL4E027DDA | –                   | –         | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 1               |
|                                  | KL4E032DDA | –                   | –         | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 1               |
|                                  | KL4E038DDA | L, #1/3             | L, #3/4   | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 2               |
|                                  | KL4E051DDA | L, #1/2             | L, #3/4   | SBFDE-AA-ZP                   | SBFDE-A-ZP  | SER-AA          | SER-AA | 2               |
|                                  | KL4E064DDA | L, #1/2             | L, #1     | SBFDE-AA-ZP                   | SBFDE-A-ZP  | SER-A           | SER-A  | 3               |
|                                  | KL4E080DDA | L, #3/4             | L, #1-1/2 | SBFDE-A-ZP                    | SBFDE-A-ZP  | SER-A           | SER-A  | 6               |
|                                  | KL4E094DDA | L, #3/4             | L, #1-1/2 | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-A  | 6               |
|                                  | KL4E110DDA | L, #1               | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL4E125DDA | L, #1               | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-B  | 6               |
|                                  | KL4E141DDA | L, #1               | L, #2     | SBFDE-B-ZP                    | SBFDE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL4E155*DA | L, #1-1/2           | L, #2-1/2 | SBFDE-B-ZP                    | SBFDE-B-ZP  | SER-B           | SER-B  | 6               |
|                                  | KL4E195*DA | L, #1-1/2           | L, #3     | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-B  | 9               |
|                                  | KL4E230*DA | G, #2               | G, #4     | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-C  | 12              |

Distributor lines are 3/16" diameter and 14" long.

Distributor connection size is 1/2" for electric defrost models with "L" nozzle and 7/8" for models with "G" nozzle.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

– Single feed circuit coils do not get a distributor/nozzle.

<sup>^</sup> TXV selections are based on -20°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range. Do not use pressure limiting TXVs when the condensing unit includes a CPR valve.

<sup>†</sup> SBFDE expansion valves are compatible with R407A, R448A and R449A/B. For other valves, follow manufacturers selection guidelines.

Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

# DISTRIBUTOR NOZZLES & EXPANSION VALVES

## HOT GAS DEFROST MODELS // 6 FPI

| Hot Gas 3-Pipe<br>Model No. |            | Hot Gas Reverse Cycle<br>2-Pipe Model No. | Nozzle @ Liq. Temp. |            | TXV^ @ Liq. Temp. |             | EEV @ Liq. Temp |        | No. of<br>Circuits |
|-----------------------------|------------|-------------------------------------------|---------------------|------------|-------------------|-------------|-----------------|--------|--------------------|
|                             |            |                                           | 50°F                | 100°F      | 50°F              | 100°F       | 50°F            | 100°F  |                    |
| R404A                       | KL6H035*DA | KL6G035*DA                                | –                   | –          | SBFSE-AAA-ZP      | SBFSE-AA-ZP | SER-AA          | SER-AA | 1                  |
|                             | KL6H042*DA | KL6G042*DA                                | L, #1/3             | L, #3/4    | SBFSE-AA-ZP       | SBFSE-AA-ZP | SER-AA          | SER-AA | 2                  |
|                             | KL6H049*DA | KL6G049*DA                                | L, #1/2             | L, #1      | SBFSE-AA-ZP       | SBFSE-A-ZP  | SER-AA          | SER-A  | 2                  |
|                             | KL6H066*DA | KL6G066*DA                                | L, #3/4             | L, #1-1/2  | SBFSE-AA-ZP       | SBFSE-A-ZP  | SER-A           | SER-A  | 2                  |
|                             | KL6H077*DA | KL6G077*DA                                | L,#3/4              | L, #1-1/2  | SBFSE-A-ZP        | SBFSE-A-ZP  | SER-A           | SER-A  | 3                  |
|                             | KL6H090*DA | KL6G090*DA                                | L, #3/4             | L, #2      | SBFSE-A-ZP        | SBFSE-A-ZP  | SER-A           | SER-A  | 5                  |
|                             | KL6H105*DA | KL6G105*DA                                | L,#1                | L, #2      | SBFSE-A-ZP        | SBFSE-B-ZP  | SER-A           | SER-B  | 6                  |
|                             | KL6H121*DA | KL6G121*DA                                | L, #1               | L, #2-1/2  | SBFSE-A-ZP        | SBFSE-B-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H142*DA | KL6G142*DA                                | L,#1-1/2            | L, #2-1/2  | SBFSE-A-ZP        | SBFSE-B-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H162*DA | KL6G162*DA                                | L,#1-1/2            | L, #3      | SBFSE-B-ZP        | SBFSE-C-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H182*DA | KL6G182*DA                                | L, #1-1/2           | L, #4      | SBFSE-B-ZP        | SBFSE-C-ZP  | SER-B           | SER-C  | 6                  |
|                             | KL6H200*DA | KL6G200*DA                                | L, #2               | L, #4      | SBFSE-B-ZP        | SBFSE-C-ZP  | SER-B           | SER-C  | 6                  |
|                             | KL6H244*DA | KL6G244*DA                                | E, #2               | E, #5      | SBFSE-C-ZP        | EBSS-6-ZP   | SER-C           | SER-C  | 9                  |
| KL6H281*DA                  | KL6G281*DA | E, #2-1/2                                 | E, #5               | SBFSE-C-ZP | EBSS-6-ZP         | SER-C       | SER-C           | 12     |                    |
| R407A/R448A/R449A/B†        | KL6H035*DA | KL6G035*DA                                | –                   | –          | SBFDE-AA-ZP       | SBFDE-AA-ZP | SER-AA          | SER-AA | 1                  |
|                             | KL6H042*DA | KL6G042*DA                                | L, #1/3             | L, #3/4    | SBFDE-AA-ZP       | SBFDE-AA-ZP | SER-AA          | SER-AA | 2                  |
|                             | KL6H049*DA | KL6G049*DA                                | L, #1/2             | L, #3/4    | SBFDE-AA-ZP       | SBFDE-AA-ZP | SER-AA          | SER-AA | 2                  |
|                             | KL6H066*DA | KL6G066*DA                                | L, #1/2             | L, #1      | SBFDE-AA-ZP       | SBFDE-A-ZP  | SER-A           | SER-A  | 2                  |
|                             | KL6H077*DA | KL6G077*DA                                | L, #3/4             | L, #1-1/2  | SBFDE-A-ZP        | SBFDE-A-ZP  | SER-A           | SER-A  | 3                  |
|                             | KL6H090*DA | KL6G090*DA                                | L, #3/4             | L, #1-1/2  | SBFDE-A-ZP        | SBFDE-B-ZP  | SER-A           | SER-A  | 5                  |
|                             | KL6H105*DA | KL6G105*DA                                | L, #1               | L, #2      | SBFDE-A-ZP        | SBFDE-B-ZP  | SER-A           | SER-B  | 6                  |
|                             | KL6H121*DA | KL6G121*DA                                | L, #1               | L, #2      | SBFDE-A-ZP        | SBFDE-B-ZP  | SER-A           | SER-B  | 6                  |
|                             | KL6H142*DA | KL6G142*DA                                | L, #1-1/2           | L, #2-1/2  | SBFDE-B-ZP        | SBFDE-B-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H162*DA | KL6G162*DA                                | L, #1-1/2           | L, #2-1/2  | SBFDE-B-ZP        | SBFDE-B-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H182*DA | KL6G182*DA                                | L, #1-1/2           | L, #3      | SBFDE-B-ZP        | SBFDE-C-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H200*DA | KL6G200*DA                                | L, #2               | L, #3      | SBFDE-B-ZP        | SBFDE-C-ZP  | SER-B           | SER-B  | 6                  |
|                             | KL6H244*DA | KL6G244*DA                                | E, #2               | E, #4      | SBFDE-C-ZP        | SBFDE-C-ZP  | SER-B           | SER-C  | 9                  |
| KL6H281*DA                  | KL6G281*DA | E, #2-1/2                                 | E, #5               | SBFDE-C-ZP | SBFDE-C-ZP        | SER-C       | SER-C           | 12     |                    |

Distributor lines are 1/4" diameter and 14" long.

Distributor connection size is 1/2" for all hot gas defrost models with "L" nozzle and 1-1/8" for models with "E" nozzle.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

– Single feed circuit coils do not get a distributor/nozzle.

^ TXV selections are based on -20°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range.

Do not use pressure limiting TXVs when the condensing unit includes a CPR valve.

## DISTRIBUTOR NOZZLES &amp; EXPANSION VALVES

## HOT GAS DEFROST MODELS // 4 FPI

|                                  | Hot Gas 3-Pipe<br>Model No. | Hot Gas Reverse Cycle<br>2-Pipe Model No. | Nozzle @ Liq. Temp. |           | TXV <sup>^</sup> @ Liq. Temp. |             | EEV @ Liq. Temp |        | No. of<br>Circuits |
|----------------------------------|-----------------------------|-------------------------------------------|---------------------|-----------|-------------------------------|-------------|-----------------|--------|--------------------|
|                                  |                             |                                           | 50°F                | 100°F     | 50°F                          | 100°F       | 50°F            | 100°F  |                    |
| R404A                            | KL4G027*DA                  | KL4H027*DA                                | –                   | –         | SBFSE-AAA-ZP                  | SBFSE-AA-ZP | SER-AA          | SER-AA | 1                  |
|                                  | KL4G032*DA                  | KL4H032*DA                                | –                   | –         | SBFSE-AA-ZP                   | SBFSE-AA-ZP | SER-AA          | SER-AA | 1                  |
|                                  | KL4G038*DA                  | KL4H038*DA                                | L, #1/3             | L, #3/4   | SBFSE-AA-ZP                   | SBFSE-AA-ZP | SER-AA          | SER-AA | 2                  |
|                                  | KL4G051*DA                  | KL4H051*DA                                | L, #1/2             | L, #1     | SBFSE-AA-ZP                   | SBFSE-A-ZP  | SER-AA          | SER-A  | 2                  |
|                                  | KL4G064*DA                  | KL4H064*DA                                | L, #3/4             | L, #1-1/2 | SBFSE-AA-ZP                   | SBFSE-A-ZP  | SER-A           | SER-A  | 3                  |
|                                  | KL4G080*DA                  | KL4H080*DA                                | L, #3/4             | L, #1-1/2 | SBFSE-A-ZP                    | SBFSE-A-ZP  | SER-A           | SER-A  | 6                  |
|                                  | KL4G094*DA                  | KL4H094*DA                                | L, #3/4             | L, #2     | SBFSE-A-ZP                    | SBFSE-A-ZP  | SER-A           | SER-B  | 6                  |
|                                  | KL4G110*DA                  | KL4H110*DA                                | L, #1               | L, #2     | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-A           | SER-B  | 6                  |
|                                  | KL4G125*DA                  | KL4H125*DA                                | L, #1               | L, #2-1/2 | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-B           | SER-B  | 6                  |
|                                  | KL4G141*DA                  | KL4H141*DA                                | L, #1-1/2           | L, #2-1/2 | SBFSE-A-ZP                    | SBFSE-B-ZP  | SER-B           | SER-B  | 6                  |
|                                  | KL4G155*DA                  | KL4H155*DA                                | L, #1-1/2           | L, #3     | SBFSE-A-ZP                    | SBFSE-C-ZP  | SER-B           | SER-B  | 6                  |
|                                  | KL4G195*DA                  | KL4H195*DA                                | E, #2               | E, #4     | SBFSE-B-ZP                    | SBFSE-C-ZP  | SER-B           | SER-C  | 9                  |
|                                  | KL4G230*DA                  | KL4H230*DA                                | E, #2               | E, #5     | SBFSE-B-ZP                    | SBFSE-C-ZP  | SER-B           | SER-C  | 12                 |
| R407A/R448A/R449A/B <sup>†</sup> | KL4H027*DA                  | KL4G027*DA                                | –                   | –         | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 1                  |
|                                  | KL4H032*DA                  | KL4G032*DA                                | –                   | –         | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 1                  |
|                                  | KL4H038*DA                  | KL4G038*DA                                | L, #1/3             | L, #3/4   | SBFDE-AA-ZP                   | SBFDE-AA-ZP | SER-AA          | SER-AA | 2                  |
|                                  | KL4H051*DA                  | KL4G051*DA                                | L, #1/2             | L, #1     | SBFDE-AA-ZP                   | SBFDE-A-ZP  | SER-AA          | SER-AA | 2                  |
|                                  | KL4H064*DA                  | KL4G064*DA                                | L, #1/2             | L, #1     | SBFDE-AA-ZP                   | SBFDE-A-ZP  | SER-A           | SER-A  | 3                  |
|                                  | KL4H080*DA                  | KL4G080*DA                                | L, #3/4             | L, #1-1/2 | SBFDE-A-ZP                    | SBFDE-A-ZP  | SER-A           | SER-A  | 6                  |
|                                  | KL4H094*DA                  | KL4G094*DA                                | L, #3/4             | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-A  | 6                  |
|                                  | KL4H110*DA                  | KL4G110*DA                                | L, #1               | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-B  | 6                  |
|                                  | KL4H125*DA                  | KL4G125*DA                                | L, #1               | L, #2     | SBFDE-A-ZP                    | SBFDE-B-ZP  | SER-A           | SER-B  | 6                  |
|                                  | KL4H141*DA                  | KL4G141*DA                                | L, #1-1/2           | L, #2-1/2 | SBFDE-B-ZP                    | SBFDE-B-ZP  | SER-B           | SER-B  | 6                  |
|                                  | KL4H155*DA                  | KL4G155*DA                                | L, #1-1/2           | L, #2-1/2 | SBFDE-B-ZP                    | SBFDE-B-ZP  | SER-B           | SER-B  | 6                  |
|                                  | KL4H195*DA                  | KL4G195*DA                                | E, #1-1/2           | E, #3     | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-B  | 9                  |
|                                  | KL4H230*DA                  | KL4G230*DA                                | E, #2               | E, #4     | SBFDE-B-ZP                    | SBFDE-C-ZP  | SER-B           | SER-C  | 12                 |

Distributor lines are 1/4" diameter and 14" long.

Distributor connection size is 1/2" for electric defrost models with "L" nozzle and 7/8" for models with "G" nozzle.

\* Each asterisk represents a variable character based on voltage ordered. See page 4 for nomenclature.

– Single feed circuit coils do not get a distributor/nozzle. Line breaks in the table above are per number of fans.

<sup>^</sup> TXV selections are based on -20°F suction temp., 8°F to 12°F evaporator TD. Contact factory for operating conditions outside of this range. Do not use pressure limiting TXVs when the condensing unit includes a CPR valve.

<sup>†</sup> SBFDE expansion valves are compatible with R407A, R448A and R449A/B. For other valves, follow manufacturers selection guidelines.

Base models (no factory-mounted components) include nozzles sized for 100°F liquid shipped loose.

# SPECIFICATIONS // ALL MODELS

| Model No. |            |              | TXV      | Refrigeration Connections |                      |       | No. of Hanger Slot Loc. | Dimensions (Inches) |        |        |         | Est. Ship Wt. (lbs) |
|-----------|------------|--------------|----------|---------------------------|----------------------|-------|-------------------------|---------------------|--------|--------|---------|---------------------|
| KL6A      | RL*E/G/H   | Liquid Line^ |          | KL6A Suction              | RL*E/ RL*G/H Suction | A'    |                         | B'                  | C'     | W      |         |                     |
| 6 FPI     | KL6A041*DA | KL6*035*DA   | External | 3/8                       | 5/8                  | 5/8   | 2                       | 17-1/4              | -      | -      | 27-1/8  | 41                  |
|           | KL6A052*DA | KL6*042*DA   | External | 3/8                       | 5/8                  | 5/8   | 2                       | 17-1/4              | -      | -      | 27-1/8  | 44                  |
|           | KL6A066*DA | KL6*049*DA   | External | 3/8                       | 5/8                  | 5/8   | 2                       | 17-1/4              | -      | -      | 27-1/8  | 47                  |
|           | KL6A073*DA | KL6*066*DA   | External | 3/8                       | 5/8                  | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 52                  |
|           | KL6A094*DA | KL6*077*DA   | External | 3/8                       | 5/8                  | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 55                  |
|           | KL6A117*DA | KL6*090*DA   | External | 3/8                       | 5/8                  | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 58                  |
|           | KL6A130*DA | KL6*105*DA   | External | 3/8                       | 5/8                  | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 62                  |
|           | KL6A141*DA | -            | External | 3/8                       | 5/8                  | -     | 2                       | 49-1/4              | -      | -      | 60-1/8  | 72                  |
|           | KL6A161*DA | KL6*121*DA   | External | 3/8                       | 5/8                  | 1-1/8 | 2                       | 49-1/4              | -      | -      | 60-1/8  | 78                  |
|           | KL6A181*DA | KL6*142*DA   | External | 3/8                       | 7/8                  | 1-1/8 | 2                       | 49-1/4              | -      | -      | 60-1/8  | 85                  |
|           | KL6A195*DA | -            | External | 3/8                       | 7/8                  | -     | 2                       | 65-1/4              | -      | -      | 76-5/8  | 115                 |
|           | KL6A235*DA | KL6*162*DA   | External | 3/8                       | 7/8                  | 1-1/8 | 2                       | 65-1/4              | -      | -      | 76-5/8  | 124                 |
|           | KL6A260*DA | KL6*182*DA   | External | 3/8                       | 7/8                  | 1-1/8 | 2                       | 65-1/4              | -      | -      | 76-5/8  | 147                 |
|           | -          | KL6*200*DA   | External | 3/8                       | -                    | 1-1/8 | 3                       | 81-1/4              | 32-5/8 | 48-5/8 | 93-1/8  | 195                 |
|           | KL6A295*DA | -            | External | 3/8                       | 1-1/8                | -     | 3                       | 81-1/4              | 32-5/8 | 48-5/8 | 93-1/8  | 218                 |
|           | -          | KL6*244*DA   | External | 3/8                       | -                    | 1-1/8 | 3                       | 97-1/4              | 48-5/8 | 48-5/8 | 109-5/8 | 238                 |
|           | KL6A330*DA | -            | External | 3/8                       | 1-1/8                | -     | 3                       | 97-1/4              | 48-5/8 | 48-5/8 | 109-5/8 | 257                 |
|           | KL6A390*DA | KL6*281*DA   | External | 3/8                       | 1-1/8                | 1-1/8 | 3                       | 97-1/4              | 48-5/8 | 48-5/8 | 109-5/8 | 262                 |
| 4 FPI     | -          | KL4*027*DA   | External | 3/8                       | -                    | 5/8   | 2                       | 17-1/4              | -      | -      | 27-1/8  | 40                  |
|           | -          | KL4*032*DA   | External | 3/8                       | -                    | 5/8   | 2                       | 17-1/4              | -      | -      | 27-1/8  | 42                  |
|           | -          | KL4*038*DA   | External | 3/8                       | -                    | 5/8   | 2                       | 17-1/4              | -      | -      | 27-1/8  | 46                  |
|           | -          | KL4*051*DA   | External | 3/8                       | -                    | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 50                  |
|           | -          | KL4*064*DA   | External | 3/8                       | -                    | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 52                  |
|           | -          | KL4*080*DA   | External | 3/8                       | -                    | 7/8   | 2                       | 33-1/4              | -      | -      | 43-5/8  | 55                  |
|           | -          | KL4*094*DA   | External | 3/8                       | -                    | 1-1/8 | 2                       | 49-1/4              | -      | -      | 60-1/8  | 79                  |
|           | -          | KL4*110*DA   | External | 3/8                       | -                    | 1-1/8 | 2                       | 49-1/4              | -      | -      | 60-1/8  | 84                  |
|           | -          | KL4*125*DA   | External | 3/8                       | -                    | 1-1/8 | 2                       | 65-1/4              | -      | -      | 76-5/8  | 124                 |
|           | -          | KL4*141*DA   | External | 3/8                       | -                    | 1-1/8 | 2                       | 65-1/4              | -      | -      | 76-5/8  | 144                 |
|           | -          | KL4*155*DA   | External | 3/8                       | -                    | 1-1/8 | 3                       | 81-1/4              | 32-5/8 | 48-5/8 | 93-1/8  | 191                 |
|           | -          | KL4*195*DA   | External | 3/8                       | -                    | 1-1/8 | 3                       | 97-1/4              | 48-5/8 | 48-5/8 | 109-5/8 | 257                 |
|           | -          | KL4*230*DA   | External | 3/8                       | -                    | 1-1/8 | 3                       | 97-1/4              | 48-5/8 | 48-5/8 | 109-5/8 | 262                 |

\* Each asterisk represents a variable character based on fin per inch, defrost and voltage ordered. See page 4 for nomenclature.


<sup>^</sup> For units with mounted TXV components. See Nozzle/TXV table for distributor connection size when TXV is field installed.

<sup>1</sup> Dimensions listed are the distance between hanger slots. Hanger slots are 3/4" deep x 1/2" wide.


## DIMENSIONAL DRAWINGS

**Figure 1: Low Profile Unit Cooler**

Front View

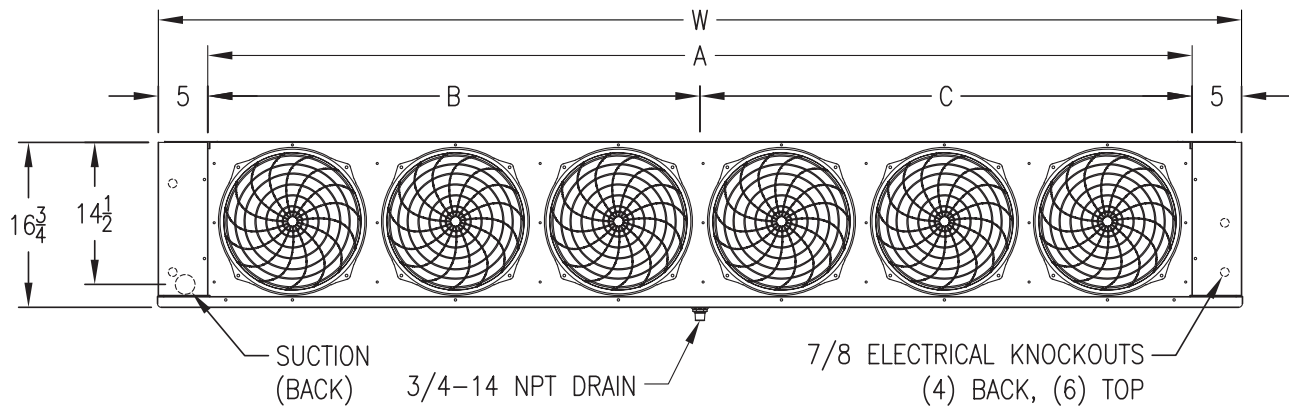

Side View

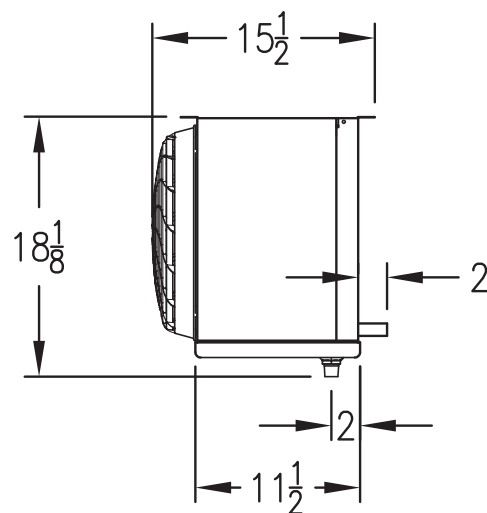

Installation Notes: All dimensions are in inches.

1. Install 12" away from back wall.
2. Drain connection is located in the center/rear of the drain pan.
3. Standard refrigerant connections are located at the left rear (facing air discharge).

## EVAPORATOR APPLICATION RATINGS

Multiple conditions combine to determine the application capacity of an evaporator. Walk-in space temperature, relative humidity, saturated suction temperature difference, and outdoor ambient temperature. All of the factors are considered when calculating an evaporator application rating. These ratings are considerably higher than the net capacity value used for DOE ratings (AWEF).

The AWEF of an evaporator is calculated using the dry coil capacity and the Daily evaporator power consumption. Power consumption included fan and defrost power. Evaporator net capacity reported to the DOE Database is dry coil capacity less the full power fan watts. DOE test conditions are at 10°F evaporator/SST temperature difference and less than 50% relative humidity and 96°F liquid temperature. These conditions create a uniform test method, but should not be used for equipment selection. The equipment selected would be too large for the application.

Published application ratings are a guideline for proper equipment selection. They account for true operating conditions experienced by equipment.

## AWEF RATINGS // AIR DEFROST MODELS

### Department of Energy Annual Walk-In Energy Factor (AWEF) Ratings

| Base Model No.                                  | Defrost Type | FPI | AWEF |
|-------------------------------------------------|--------------|-----|------|
| COOLER MODELS <sup>1</sup> - AIR DEFROST MODELS |              |     |      |
| K*6A041*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A052*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A066*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A073*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A094*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A117*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A130*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A141*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A161*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A181*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A195*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A235*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A260*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A295*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A330*DA                                      | Air Defrost  | 6   | 9.00 |
| K*6A390*DA                                      | Air Defrost  | 6   | 9.00 |

\*Each asterisk represents a variable character based upon connection, defrost and voltage ordered. See page 4 for nomenclature.

<sup>1</sup> If the model has a numerical value in the table above, the following statement applies:

"The evaporator is designed and certified for use in walk-in cooler applications."

## AWEF RATINGS // ELECTRIC DEFROST MODELS

Department of Energy Annual Walk-In Energy Factor  
(AWEF) Ratings

| Base Model No.                                       | Defrost Type     | FPI | AWEF |
|------------------------------------------------------|------------------|-----|------|
| COOLER MODELS <sup>1</sup> - ELECTRIC DEFROST MODELS |                  |     |      |
| K*6E035DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E042DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E049DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E066DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E077DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E090DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E105DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E121DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E142DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E162DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E182DDA                                           | Electric Defrost | 6   | 9.00 |
| K*6E200*DA                                           | Electric Defrost | 6   | 9.00 |
| K*6E244*DA                                           | Electric Defrost | 6   | 9.00 |
| K*6E281*DA                                           | Electric Defrost | 6   | 9.00 |

\*Each asterisk represents a variable character based upon connection, defrost and voltage ordered. See nomenclature page for details.

<sup>1</sup> If the model has a numerical value in the table above, the following statement applies:  
"The evaporator is designed and certified for use in walk-in cooler applications."

<sup>2</sup> If the model has a numerical value in the table above, the following statement applies:  
"The evaporator is designed and certified for use in walk-in freezer applications."

Department of Energy Annual Walk-In  
Energy Factor (AWEF) Ratings

| Base Model No.                                 | Defrost Type     | FPI | AWEF |
|------------------------------------------------|------------------|-----|------|
| FREEZER MODELS <sup>2</sup> - ELECTRIC DEFROST |                  |     |      |
| K*6E035DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E042DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E049DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E066DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E077DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E090DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E105DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E121DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E142DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E162DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E182DDA                                     | Electric Defrost | 6   | 4.15 |
| K*6E200*DA                                     | Electric Defrost | 6   | 4.15 |
| K*6E244*DA                                     | Electric Defrost | 6   | 4.15 |
| K*6E281*DA                                     | Electric Defrost | 6   | 4.15 |
| K*4E027DDA                                     | Electric Defrost | 4   | 3.94 |
| K*4E032DDA                                     | Electric Defrost | 4   | 3.95 |
| K*4E038DDA                                     | Electric Defrost | 4   | 3.96 |
| K*4E051DDA                                     | Electric Defrost | 4   | 3.96 |
| K*4E064DDA                                     | Electric Defrost | 4   | 3.99 |
| K*4E080DDA                                     | Electric Defrost | 4   | 4.01 |
| K*4E094DDA                                     | Electric Defrost | 4   | 4.03 |
| K*4E110DDA                                     | Electric Defrost | 4   | 4.06 |
| K*4E125DDA                                     | Electric Defrost | 4   | 4.07 |
| K*4E141DDA                                     | Electric Defrost | 4   | 4.09 |
| K*4E155*DA                                     | Electric Defrost | 4   | 4.10 |
| K*4E195*DA                                     | Electric Defrost | 4   | 4.15 |
| K*4E230*DA                                     | Electric Defrost | 4   | 4.15 |

# AWEF RATINGS // HOT GAS MODELS

Department of Energy Annual Walk-In Energy Factor  
(AWEF) Ratings

| Base Model No.                               | Defrost Type    | FPI | AWEF |
|----------------------------------------------|-----------------|-----|------|
| COOLER MODELS <sup>1</sup> - HOT GAS DEFROST |                 |     |      |
| KL6*035*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*042*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*049*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*066*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*077*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*090*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*105*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*121*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*142*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*162*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*182*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*200*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*244*DA                                   | Hot Gas Defrost | 6   | 9.00 |
| KL6*281*DA                                   | Hot Gas Defrost | 6   | 9.00 |

\*Each asterisk represents a variable character based upon connection, defrost and voltage ordered. See nomenclature page for details.

<sup>1</sup> If the model has a numerical value in the table above, the following statement applies:  
"The evaporator is designed and certified for use in walk-in cooler applications."

<sup>2</sup> If the model has a numerical value in the table above, the following statement applies:  
"The evaporator is designed and certified for use in walk-in freezer applications."

Department of Energy Annual Walk-In Energy Factor  
(AWEF) Ratings

| Base Model No.                                | Defrost Type    | FPI | AWEF |
|-----------------------------------------------|-----------------|-----|------|
| FREEZER MODELS <sup>2</sup> - HOT GAS DEFROST |                 |     |      |
| KL6*035*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*042*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*049*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*066*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*077*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*090*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*105*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*121*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*142*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*162*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*182*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*200*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*244*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL6*281*DA                                    | Hot Gas Defrost | 6   | 4.15 |
| KL4*027*DA                                    | Hot Gas Defrost | 4   | 3.94 |
| KL4*032*DA                                    | Hot Gas Defrost | 4   | 3.95 |
| KL4*038*DA                                    | Hot Gas Defrost | 4   | 3.96 |
| KL4*051*DA                                    | Hot Gas Defrost | 4   | 3.96 |
| KL4*064*DA                                    | Hot Gas Defrost | 4   | 3.99 |
| KL4*080*DA                                    | Hot Gas Defrost | 4   | 4.01 |
| KL4*094*DA                                    | Hot Gas Defrost | 4   | 4.03 |
| KL4*110*DA                                    | Hot Gas Defrost | 4   | 4.06 |
| KL4*125*DA                                    | Hot Gas Defrost | 4   | 4.07 |
| KL4*141*DA                                    | Hot Gas Defrost | 4   | 4.09 |
| KL4*155*DA                                    | Hot Gas Defrost | 4   | 4.10 |
| KL4*195*DA                                    | Hot Gas Defrost | 4   | 4.15 |
| KL4*230*DA                                    | Hot Gas Defrost | 4   | 4.15 |



# KRAMER

ENGINEERED FOR COOL.™

©2026 Heat Transfer Products Group

Published January 2026

KM-RLX-A1-0126

**[kramer.htpg.com](http://kramer.htpg.com)**

This information is the most current and accurate information available and is subject to change without notice. HTPG makes no warranty or guarantee of any kind, express or implied, regarding the information set forth herein, including without limitation warranty regarding its currency, accuracy or completeness or any warranty of merchantability or fitness for a particular purpose.

