

Reach - In Unit Cooler

Publication No. H116.1
August, 2007




The **T-Temp** model unit cooler is built to mount from the ceiling or wall wherever a compact unit cooler is required.

The versatile **T-Temp** is designed for use in under counter refrigerators, back bars, reach-ins and other applications. The optional thermostatic expansion valve is mounted inside of the unit.

All **T-Temp** units are available with our specially formulated coil coating that provides superior corrosion resistance for the coil surface.

SPECIFICATIONS

MODEL NUMBER	CAP. (Btu/hr)		CFM	MOTOR			CONNECTIONS (in.)			DIMENSIONS (in.)			APPRX SHIP WT. (LBS)
	TD 10°F	TD 15°F		QTY	AMPS 115V	AMPS 230/1	LIQUID	SUCTION	DRAIN	H	W	D	
TT18-8	800	1200	200	1	0.73	0.37	1/2 F.N.	3/8 OD	1/2 OD	7-1/4	13-3/4	6	10
TT28-13	1300	1950	380	2	1.46	0.73	1/2 F.N.	3/8 OD	1/2 OD	7-1/4	19-1/4	6	15
TT28-17	1700	2550	360	2	1.46	0.73	1/2 F.N.	3/8 OD	1/2 OD	7-1/4	19-1/4	7	16

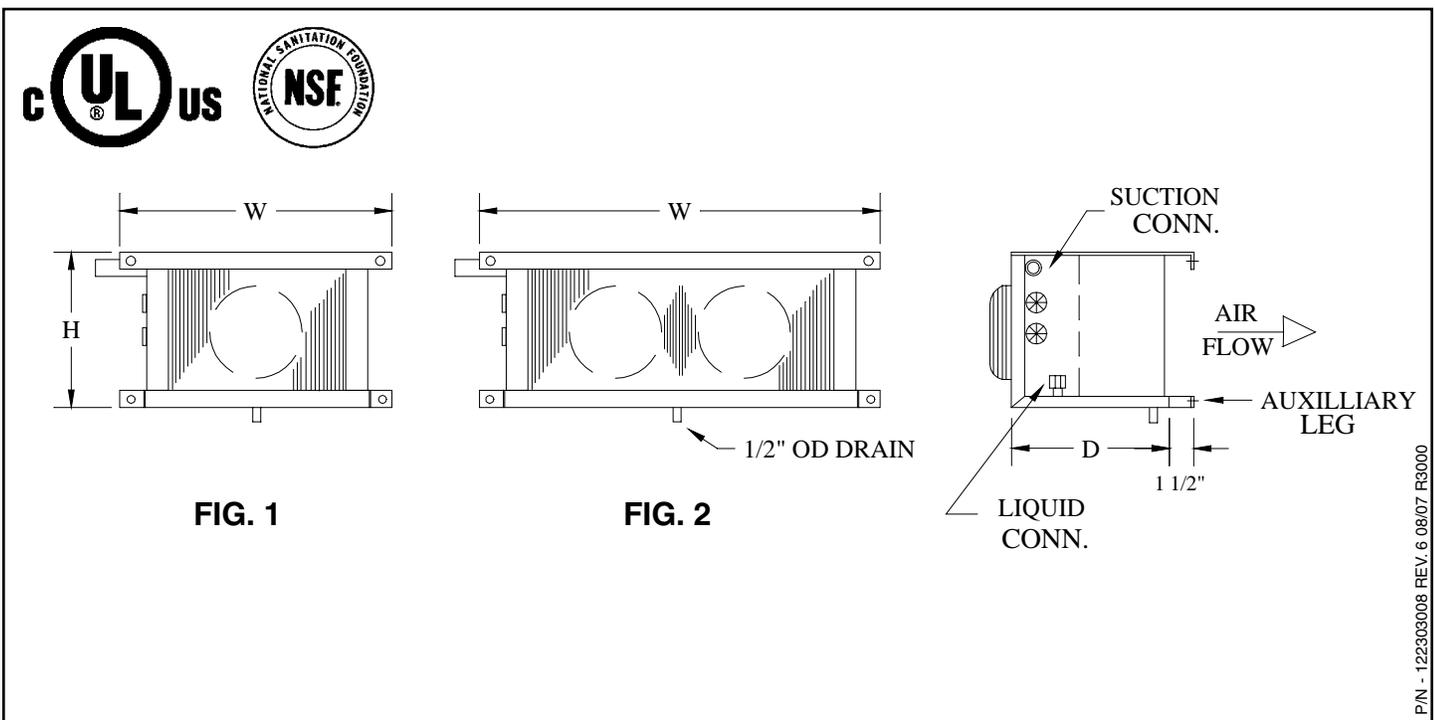

Due to continuing product development, specifications are subject to change without notice.