


russell

FLO-TEMP

LOW VELOCITY UNIT COOLERS

Two way gentle air flow. High humidity for less meat shrinkage, better storage. Comfortable sound level. Six fins per inch for greater efficiency. For meat cutting, holding and packaging rooms, fruit and vegetable storage rooms and florist boxes — from 6,700 to 26,500 BTU/HR.

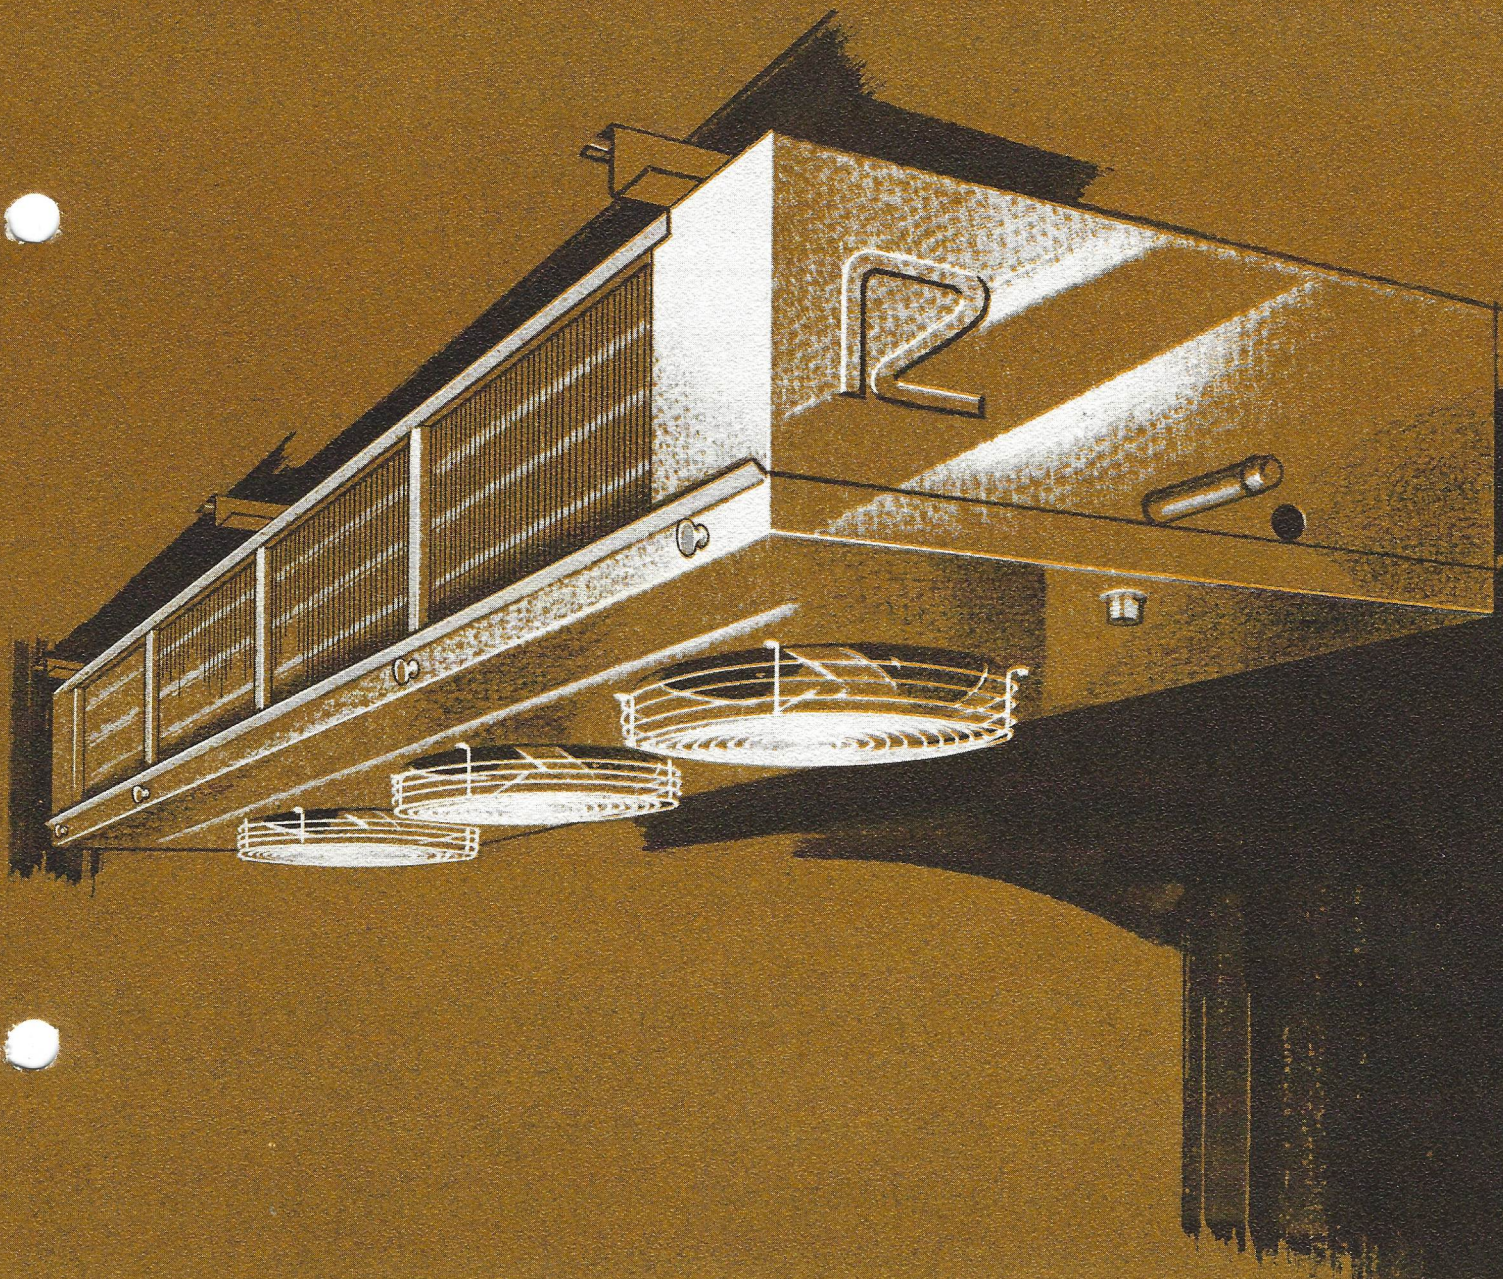



russell



FLO-TEMP FEATURES

Exclusive RUSSELL-BOND™ full collar coil. Rust-proof aluminum housing. Lightweight, easy to install. Drain pan removable without tools. Cleanable fan filters available. Factory prewired motors and heaters. U.L. listed and N.S.F. approved.

Available with RUSSELL LIGHTNING Defrost System (electric). See RUSSELL Defrost Bulletin for details.

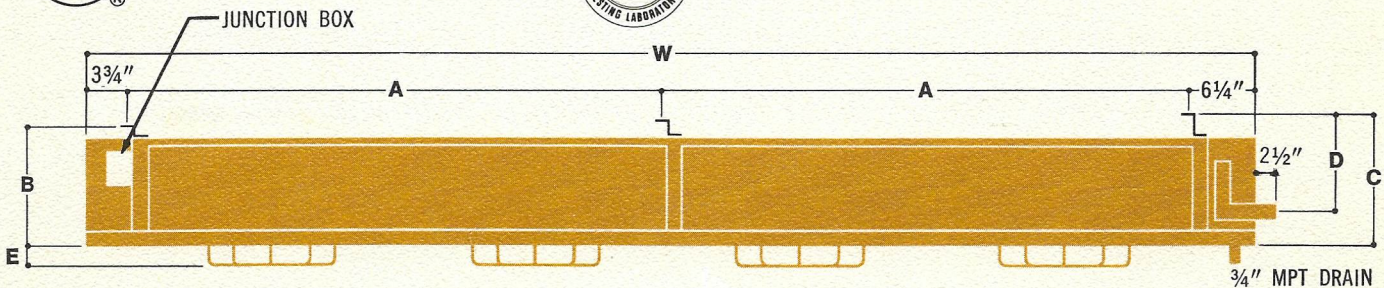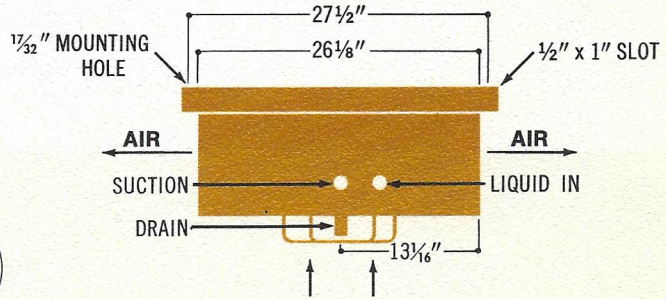

FLO-TEMP DIMENSIONS/IN INCHES

| MODEL | NO. FANS | NO. HANGERS | A | B | C | D | E | W | LIQUID CONN. F.N. | SUCTION CONN. O.D.S. | WEIGHT |
|-----------|----------|-------------|--------|----|-------|---------|-------|-----|-------------------|----------------------|--------|
| FL26-67 | 2 | 2 | 49 | 8 | 8 1/2 | 6 13/16 | 1 1/2 | 59 | 1/2 | 7/8 | 100 |
| FL36-100 | 3 | 3 | 36 1/2 | 8 | 9 | 7 7/16 | 1 1/2 | 83 | 1/2 | 7/8 | 160 |
| FL36-135* | 3 | 3 | 36 1/2 | 11 | 12 | 9 15/16 | 2 | 83 | 1/2 | 1 1/8 | 207 |
| FL46-180* | 4 | 3 | 48 1/2 | 11 | 12 | 9 13/16 | 2 | 107 | 1/2 | 1 1/8 | 291 |
| FL46-265* | 4 | 3 | 48 1/2 | 14 | 15 | 12 3/4 | 2 | 107 | 1/2 | 1 3/8 | 320 |

FLO-TEMP SPECIFICATIONS

| MODEL | BTU/HR | | FANS | | H.P. | MOTOR | | | ELECTRIC DEFROST | | |
|-----------|--------|--------|------|----------|--------|-------|-----|------|------------------|-------|------|
| | 10° TD | 12° TD | CFM | NO./SIZE | | AMPS | RPM | 115V | 230V | WATTS | AMPS |
| FL26-67 | 6700 | 8040 | 1130 | 2-10" | 2-1/30 | 1550 | 3.4 | 1.7 | 3940 | 17.2 | 1 |
| FL36-100 | 10000 | 12000 | 1680 | 3-10" | 3-1/30 | 1550 | 5.1 | 2.55 | 5960 | 15.8 | 3 |
| FL36-135* | 13500 | 16200 | 1920 | 3-12" | 3-1/20 | 1550 | 6.6 | 3.3 | 5960 | 15.8 | 3 |
| FL46-180* | 18000 | 21600 | 2570 | 4-12" | 4-1/20 | 1550 | 8.8 | 4.4 | 8060 | 21.1 | 3 |
| FL46-265* | 26500 | 31800 | 2820 | 4-12" | 4-1/20 | 1550 | 8.8 | 4.4 | 8060 | 21.1 | 3 |

MODEL NUMBERS: FL26-67E
 FL—FLO-TEMP Model designation
 2—Number of fans
 6—Number of fins per inch
 67—BTU capacity in hundreds (6,700)
 E—Electric defrost

* Require externally equalized TX Valve.
 Coils standard circuited for R-12.

WHEN ORDERING SPECIFY

1. Model number
2. Type of defrost
3. Electrical characteristics (voltage, frequency, phase)
4. Type of refrigerant
5. Suction temperature
6. Entering air-to-refrigerant T.D.
7. Fan filters, if required

Russell Coil Company
 221 South Berry Street, Brea, California 92621
 Brea 714 529 1935/LA 213 691 3246

A subsidiary of Ardco Inc.